V1.0-2024219

2.92mm Male to SSMP Female, Adapter, RA4021
DC-40GHz, Straight

Dimensions(mm) Tolerance±1%

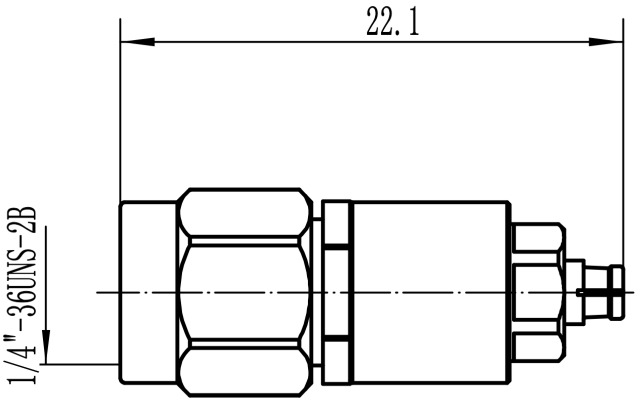

Electrical & Environmental

Frequency Range	DC-40GHz	**Impedance**	50 ohm
VSWR	1.3 max	**Operating Temp**	-55°C to +165°C
Insertion Loss	0.40dB max , Typ 0.3dB		

Mechanical & Product Information

Product Number	RA4021, H-Grade	**Connector**	2.92mm Male to SSMP Female
Connector Body	Passivated stainless steel & BeCu	**Shape/Mounting**	Straight, None
Center Contact	Gold plated beryllium copper	**Insulator**	PEI
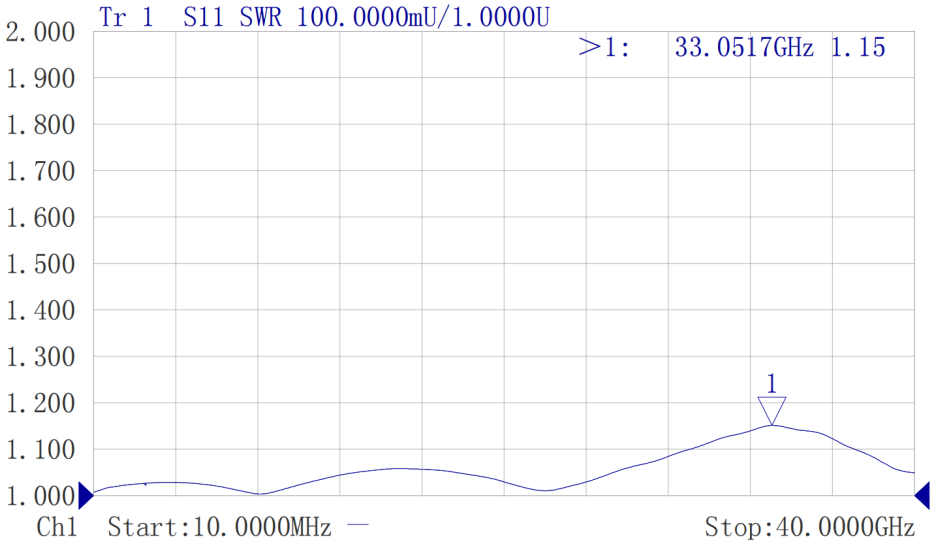
Typical Test Data