




2.92mm(K,SK) Female to SSMP Male Full Detent, Adapter, RA4022H DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

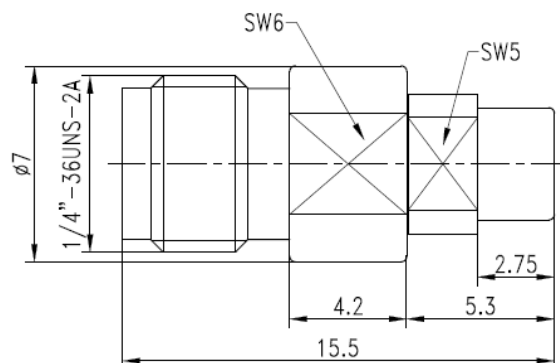

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	0.40dB max , Typ 0.3dB, $\leq 0.08\sqrt{f(\text{GHz})}\text{dB}$

Mechanical & Product Information

Product Number	RA4022H, JP-Grade	Connector	2.92mm(K,SK) Female to SSMP Male Full Detent
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	15.5(L)*7(φ)mm	Net Weight	About 2.2g

Typical Test Data

