




2.92mm(K,SK) Female to SSMA Female, Adapter, RA4027 DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

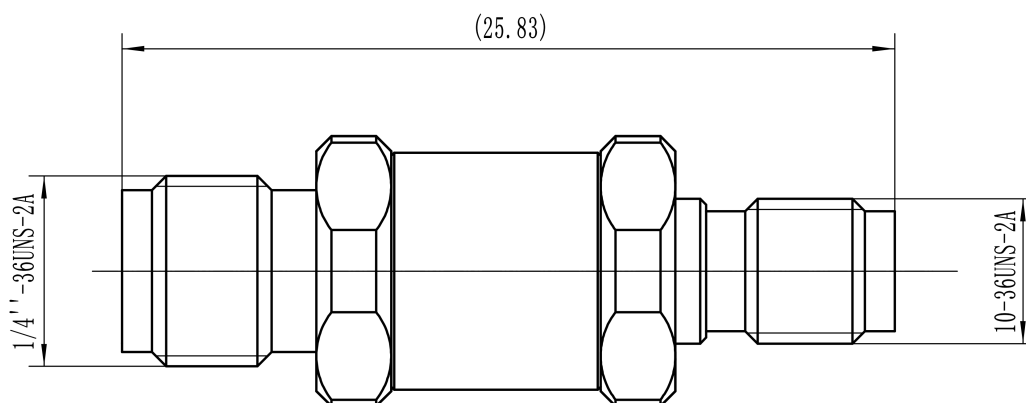

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	-

Mechanical & Product Information

Product Number	RA4027, H-Grade	Connector	2.92mm(K,SK) Female to SSMA Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	25.83(L)mm	Net Weight	-

Typical Test Data

