




NMD2.92 Male to 2.92mm(K,SK) Female, Adapter, RA4036F

DC-40GHz, 4 hole flange

Dimensions(mm) Tolerance $\pm 1\%$

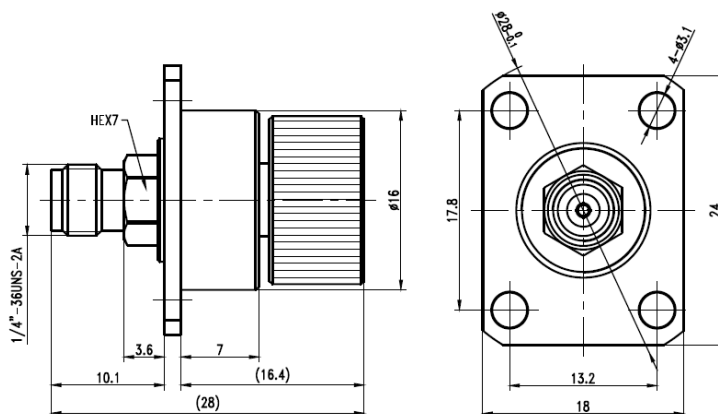

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.2 max , Typ 1.15	Insertion Loss	0.30dB max $\leq 0.05\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA4036F, U-Grade	Connector	NMD2.92 Male to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, 4 hole flange
Center Contact	1.27 μ m gold plated beryllium copper	Insulator	PEI
Dimension	28(L)mm	Net Weight	About 27.2g

Typical Test Data

