




1.0mm Female to 2.92mm(K,SK) Female, Adapter, RA4041H DC-40GHz

Dimensions(mm) Tolerance±1%

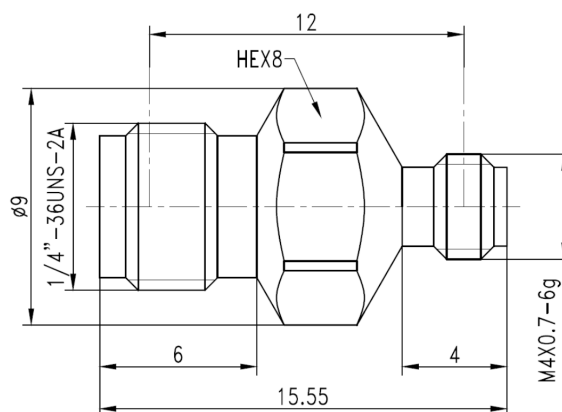


Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max (1.0端互配测试)	Insertion Loss	0.40dB max $\leq 0.08\sqrt{f(\text{GHz})}$ dB
Mating Cycles	>500 Cycles	OT Range	-55°C to +165°C

Mechanical & Product Information

Product Number	RA4041H, U-Grade	Connector	1.0mm Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27μm gold plated beryllium copper	Insulator	PEI
Dimension	15.55(L)*9(φ)mm	Net Weight	About 2.7g

Typical Test Data

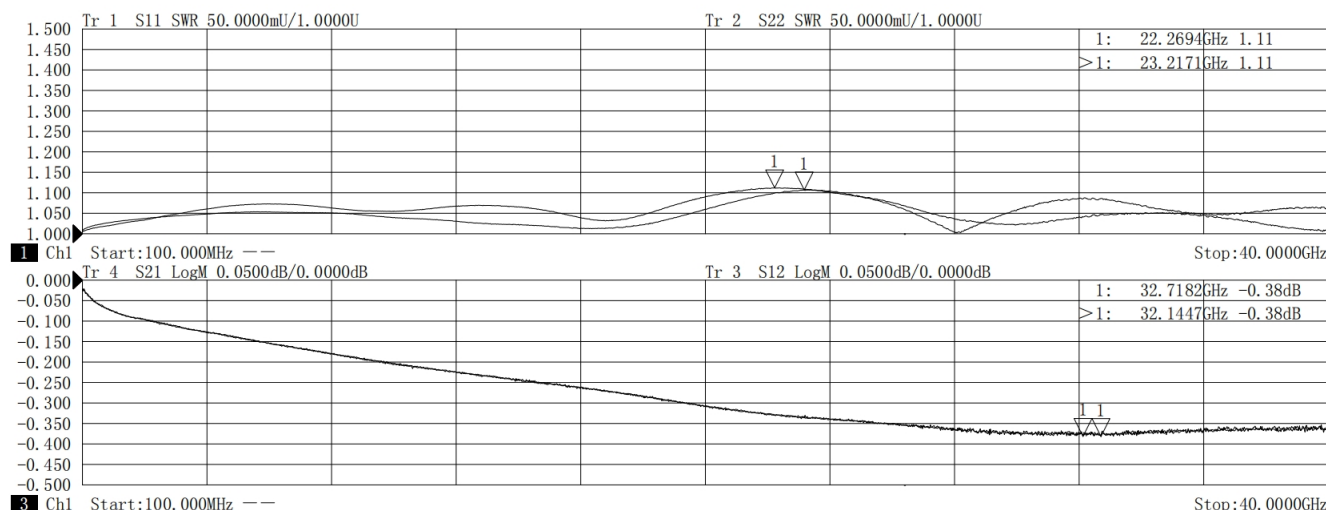



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com [86-755-88840350](tel:86-755-88840350)