




**1.0mm Female to 2.92mm(K,SK) Female, Adapter, [RA4041](#)
DC-40GHz, Straight**

Dimensions(mm) Tolerance $\pm 1\%$

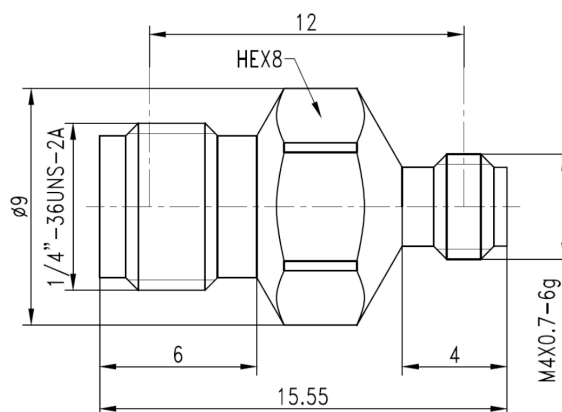

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max 1.0端配对测试	Operating Temp	-55°C to +165°C

Mechanical & Product Information

Product Number	RA4041, JP-Grade	Connector	1.0mm Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI