




1.0mm Male to 2.92mm(K,SK) Male, Adapter, RA4042H DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

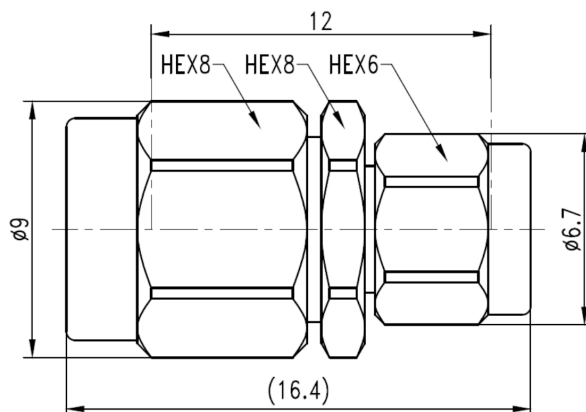


Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.15 max 1.0端配对测试	Insertion Loss	-
Mating Cycles	>500 Cycles	OT Range	-55°C to +165°C

Mechanical & Product Information

Product Number	RA4042H, JP-Grade	Connector	1.0mm Male to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI
Dimension	16.4(L)*9(φ)mm	Net Weight	About 3.8g

Typical Test Data

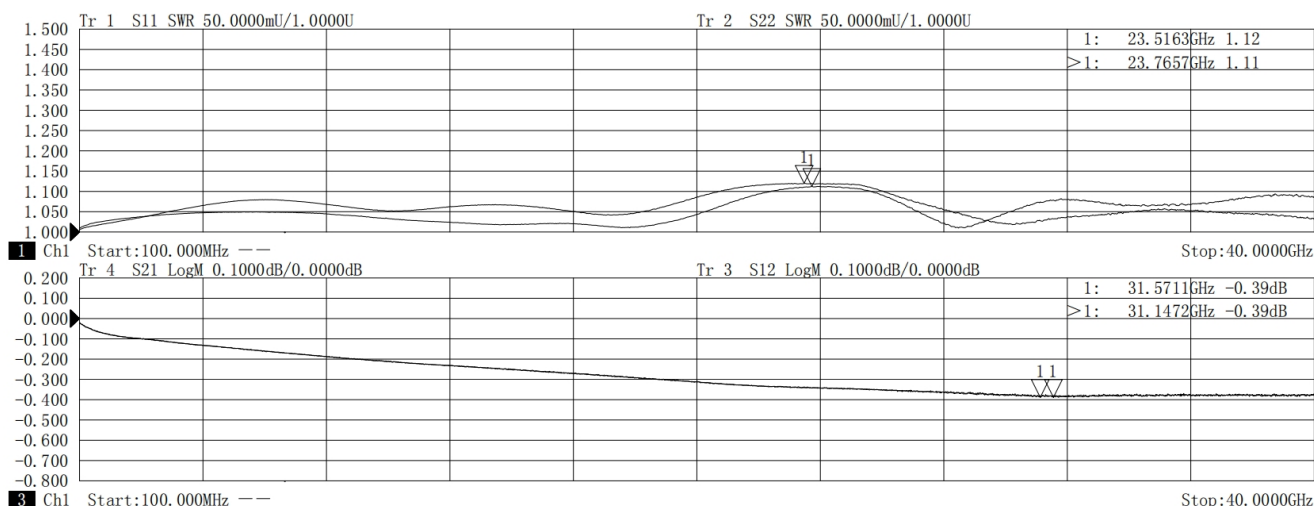



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com [86-755-88840350](tel:86-755-88840350)