




SMP(GPO) Female to SMP(GPO) Female, Adapter, RA40P01H-GBC DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

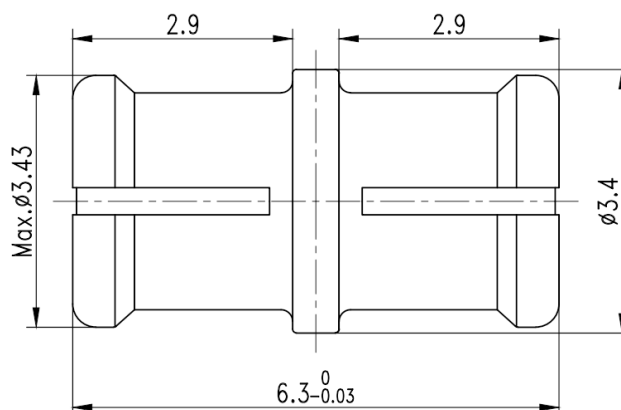

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.5 max (加两个转接器互配测试)	Insertion Loss	0.30dB max

Mechanical & Product Information

Product Number	RA40P01H-GBC, U-Grade	Connector	SMP(GPO) Female to SMP(GPO) Female
Connector Body	Gold plated beryllium copper	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	6.3(L)mm	Net Weight	About 0.3g

Typical Test Data

