




SSMA Male to SMP(GPO) Female, Adapter, RA40SA05 DC-40GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

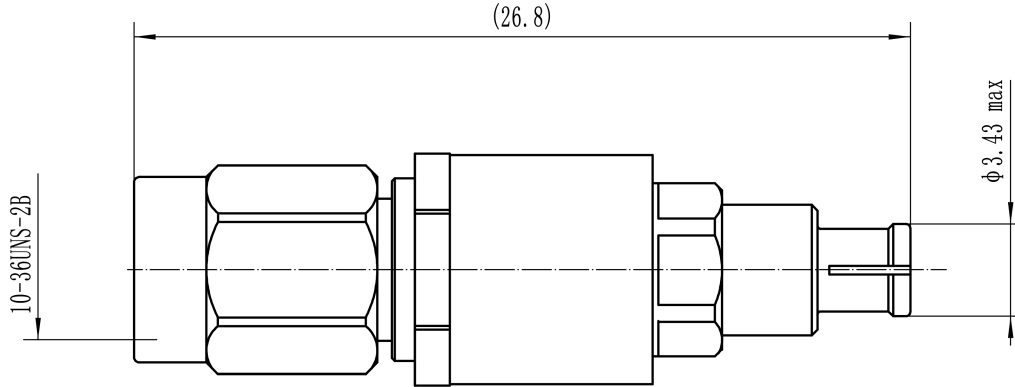

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.3 max	Operating Temp	-55°C to +165°C

Mechanical & Product Information

Product Number	RA40SA05, H-Grade	Connector	SSMA Male to SMP(GPO) Female
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE

Typical Test Data

