




## SSMA Male to SSMP Male Full Detent, Adapter, RA40SA08 DC-40GHz, Straight

### Dimensions(mm) Tolerance $\pm 1\%$

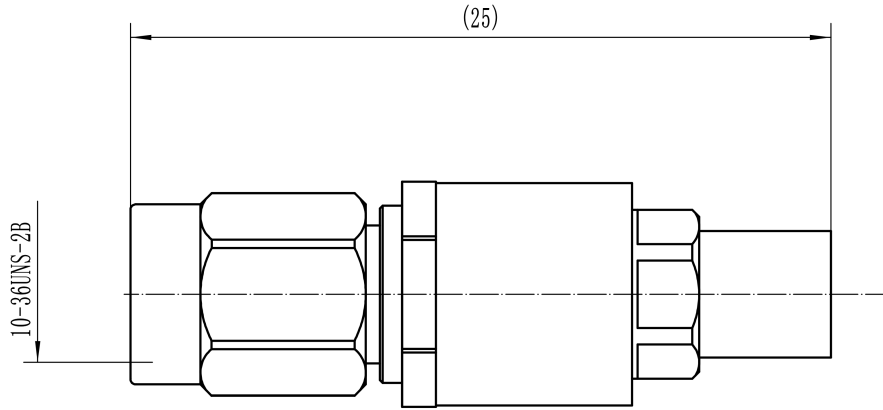

### Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-55°C to +165°C

### Mechanical & Product Information

Product Number	RA40SA08, H-Grade	Connector	SSMA Male to SSMP Male Full Detent
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

### Typical Test Data

