




SSMA Female to SSMP Male Full Detent, Adapter, RA40SA10
DC-40GHz

Dimensions(mm) Tolerance±1%

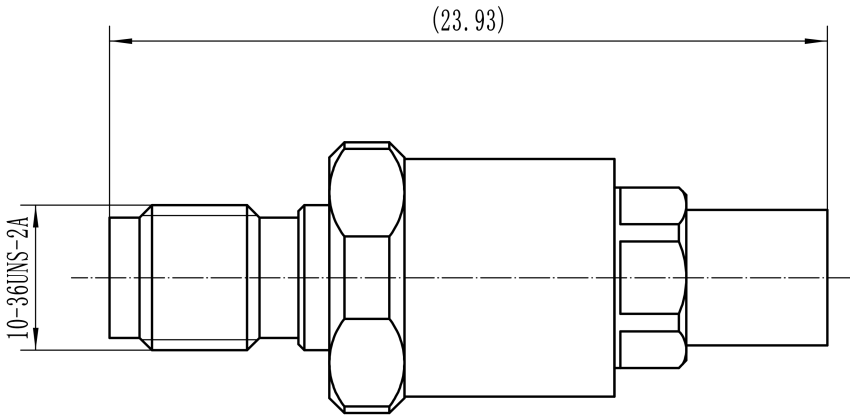

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.25 max	Insertion Loss	-

Mechanical & Product Information

Product Number	RA40SA10, H-Grade	Connector	SSMA Female to SSMP Male Full Detent
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	23.93(L)mm	Net Weight	-

Typical Test Data

