




SSMA Female to SSMP Female, Adapter, RA40SA11 DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

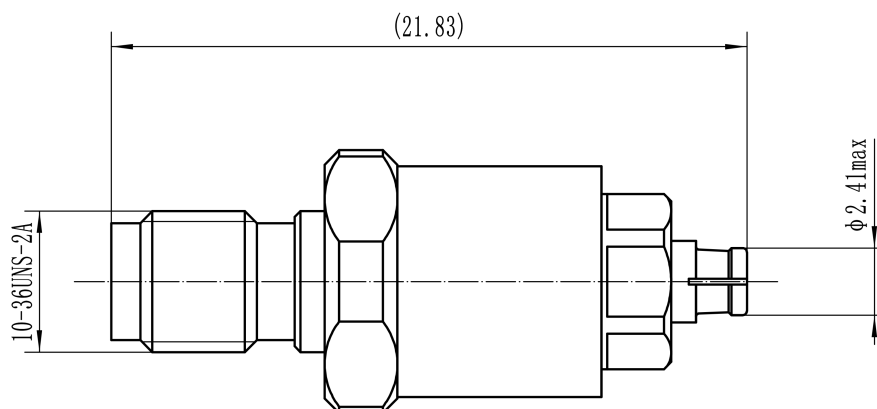

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.25 max	Insertion Loss	-

Mechanical & Product Information

Product Number	RA40SA11, H-Grade	Connector	SSMA Female to SSMP Female
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	21.83(L)mm	Net Weight	-

Typical Test Data

