




2.92mm(K,SK) Female to SL Male, Adapter, RA40SL01 DC-40GHz

Dimensions(mm) Tolerance $\pm 1\%$

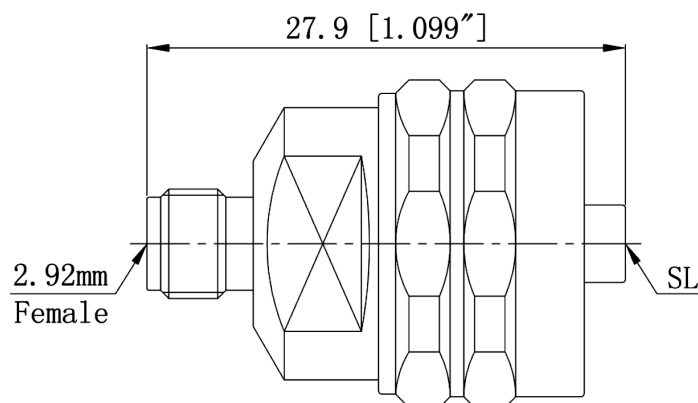

Electrical & Environmental

Frequency Range	DC-40GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-55°C to +165°C

Mechanical & Product Information

Product Number	RA40SL01, E-Grade	Connector	2.92mm(K,SK) Female to SL Male
Connector Body	Passivated stainless steel&Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

Typical Test Data

