




2.4mm Female to 2.4mm Female, Adapter, RA5001YSH DC-50GHz, Bulkhead

Dimensions(mm) Tolerance±1%

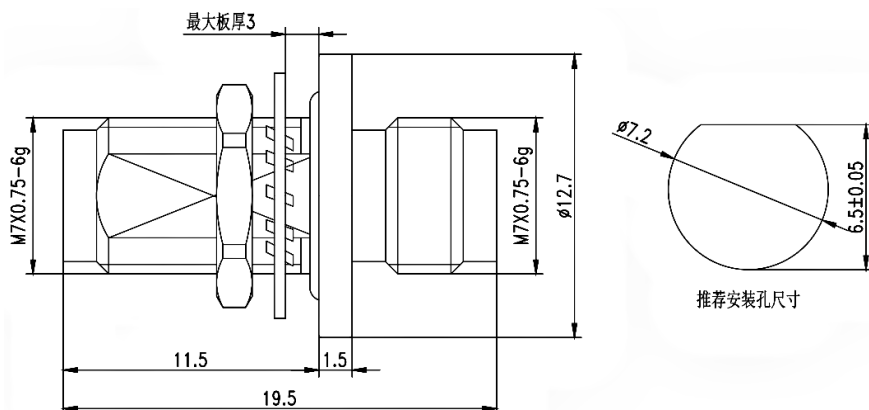

Electrical & Environmental

Frequency Range	DC-50GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	0.20dB max $\leq 0.05\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA5001YSH, JP-Grade, Sealing ring	Connector	2.4mm Female to 2.4mm Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, Bulkhead
Center Contact	Gold plated beryllium copper	Insulator	PEI
Dimension	19.5(L)*12.7(φ)mm	Net Weight	-

Typical Test Data

