


2.4mm Female to 2.4mm Male, Adapter, RA5003H DC-50GHz

Dimensions(mm) Tolerance $\pm 1\%$

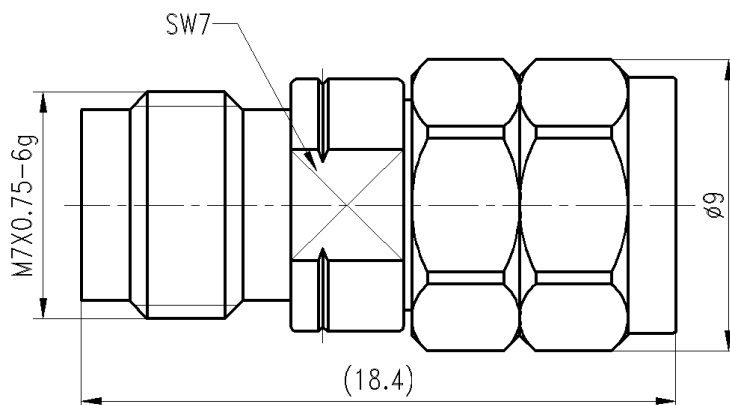

Electrical & Environmental

Frequency Range	DC-50GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	-

Mechanical & Product Information

Product Number	RA5003H, JP-Grade	Connector	2.4mm Female to 2.4mm Male
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PEI
Dimension	18.4(L)*9(φ)mm	Net Weight	-

Typical Test Data

