




## 1.85mm Male to SSMP Male Full Detent, Adapter, RA6708 DC-67GHz, Straight

### Dimensions(mm) Tolerance±1%

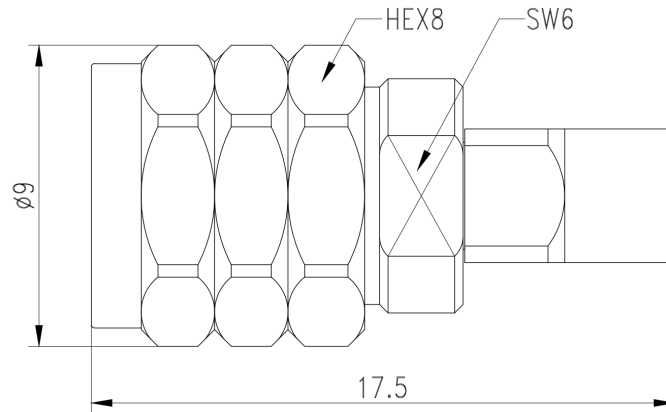

### Electrical & Environmental

<b>Frequency Range</b>	DC-67GHz	<b>Impedance</b>	50 ohm
<b>VSWR</b>	1.3 max (对配测试)	<b>Operating Temp</b>	-55°C to +165°C
<b>Insertion Loss</b>	0.55dB max $\leq 0.08\sqrt{f(\text{GHz})}$ dB		

### Mechanical & Product Information

<b>Product Number</b>	RA6708, JP-Grade	<b>Connector</b>	1.85mm Male to SSMP Male Full Detent
<b>Connector Body</b>	Passivated stainless steel	<b>Shape/Mounting</b>	Straight, None
<b>Center Contact</b>	Gold plated beryllium copper	<b>Insulator</b>	PEI

### Typical Test Data

