






Dimensions(mm) Tolerance ±1%

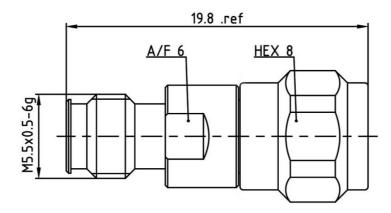

Electrical & Environmental

Frequency Range	DC-90GHz	Impedance	50 ohm
VSWR	1.4 max	Operating Temp	-65°C to +165°C

Mechanical & Product Information

Product Number	RA9001, H-Grade	Connector	1.35mm Male to 1.35mm Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

