




1.0mm Female to 1.0mm Female, Hermetically Sealed Adapter, RAHS110W01YH DC-110GHz, Bulkhead

Dimensions(mm) Tolerance±1%

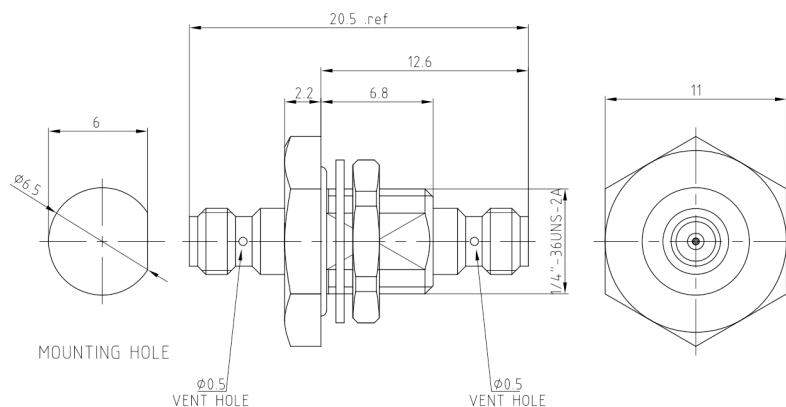


Electrical & Environmental

Frequency Range	DC-110GHz	Impedance	50 ohm
VSWR	1.75 max	Insertion Loss	-
Hermetic	1*10 ⁻⁸ cc/sec of Helium at 1 ATM		
Mating Cycles	>500 Cycles	OT Range	-65°C to +125°C

Mechanical & Product Information

Product Number	RAHS110W01YH, P-Grade, Vacuum Application	Connector	1.0mm Female to 1.0mm Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, Bulkhead
Center Contact	Gold plated beryllium copper	Insulator	Glass&PEI
Dimension	20.5(L)mm	Net Weight	-

Typical Test Data

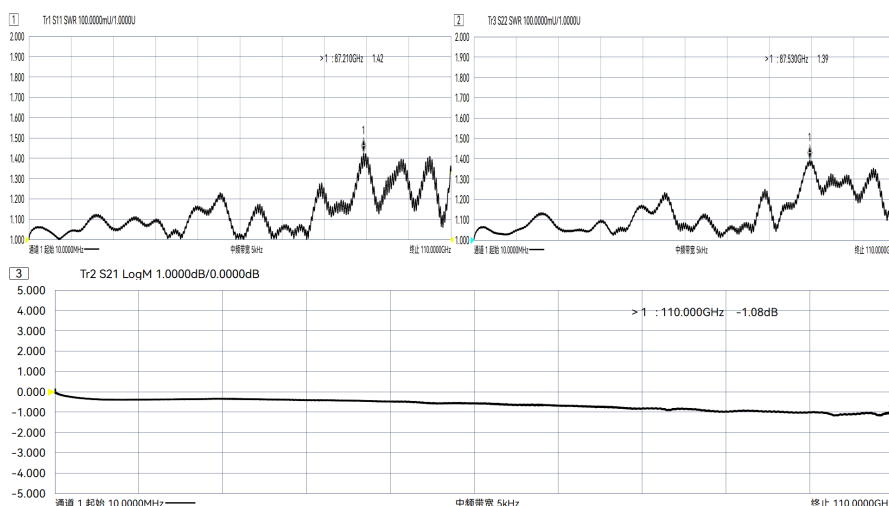



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com [86-755-88840350](tel:86-755-88840350)