




4.3-10 Male to 4.3-10 Female, Adapter, RAL06D05 DC-6GHz, Straight

Dimensions(mm) Tolerance±1%

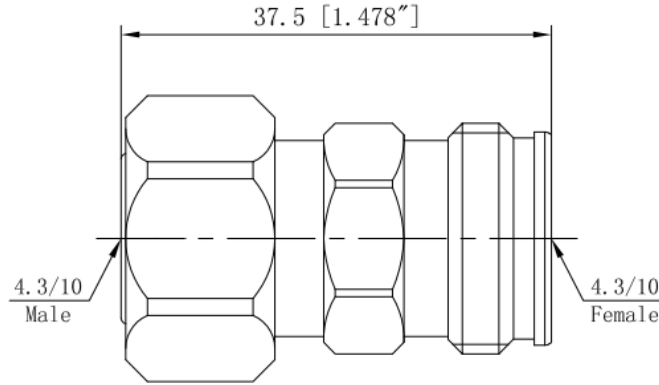

Electrical & Environmental

| | | | |
|------------------------|-------------|-----------------------|-----------------|
| Frequency Range | DC-6GHz | Impedance | 50 ohm |
| VSWR | 1.2 max | Operating Temp | -55°C to +165°C |
| PIM | -160dBc min | | |

Mechanical & Product Information

| | | | |
|-----------------------|--------------------------------|-----------------------|------------------------------|
| Product Number | RAL06D05, H-Grade, Low PIM | Connector | 4.3-10 Male to 4.3-10 Female |
| Connector Body | Ternary alloy plated brass | Shape/Mounting | Straight, None |
| Center Contact | Silver plated beryllium copper | Insulator | PTFE |

Typical Test Data

