


### 4.3-10 Male to N Female, Adapter, RAL06D32Y DC-6GHz, Straight, Bulkhead

Dimensions(mm) Tolerance $\pm 1\%$

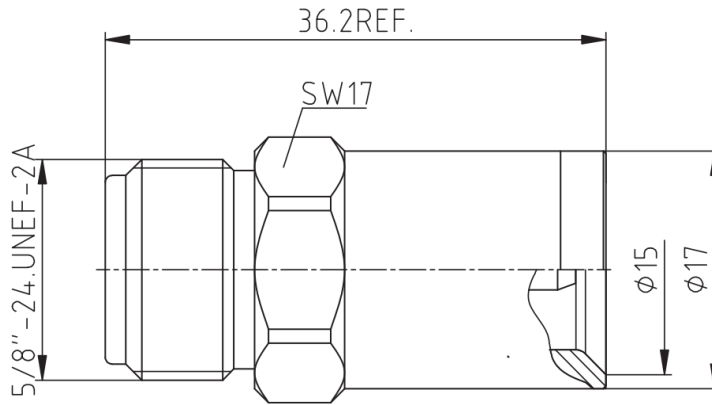

#### Electrical & Environmental

<b>Frequency Range</b>	DC-6GHz	<b>Impedance</b>	50 ohm
<b>VSWR</b>	1.25 max	<b>Operating Temp</b>	-55°C to +165°C
<b>PIM</b>	-160dBc min		

#### Mechanical & Product Information

<b>Product Number</b>	RAL06D32Y, H-Grade, Low PIM	<b>Connector</b>	4.3-10 Male to N Female
<b>Connector Body</b>	Ternary alloy plated brass	<b>Shape/Mounting</b>	Straight, Bulkhead
<b>Center Contact</b>	BeCu/Brass, Silver plating	<b>Insulator</b>	PTFE

