




4.3-10 Female to N Female, Adapter, RAL06D33 DC-6GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

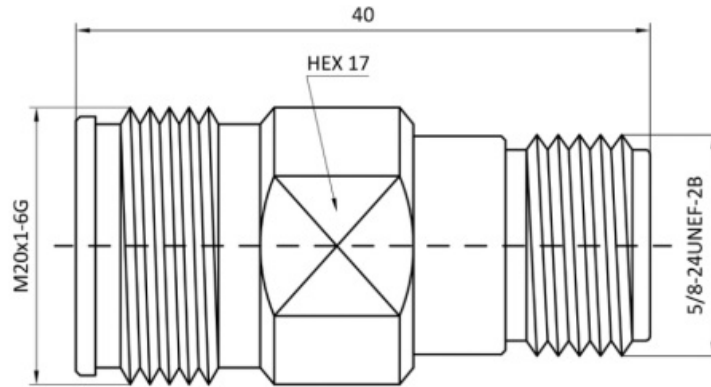

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-45°C to +125°C
PIM	-155dBc min		

Mechanical & Product Information

Product Number	RAL06D33, E-Grade	Connector	4.3-10 Female to N Female
Connector Body	Ternary alloy plated brass	Shape/Mounting	Straight, None
Center Contact	Brass, Silver plating	Insulator	PTFE