


## 4.3-10 Male to SMA Female, Adapter, RAL06D36 DC-6GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

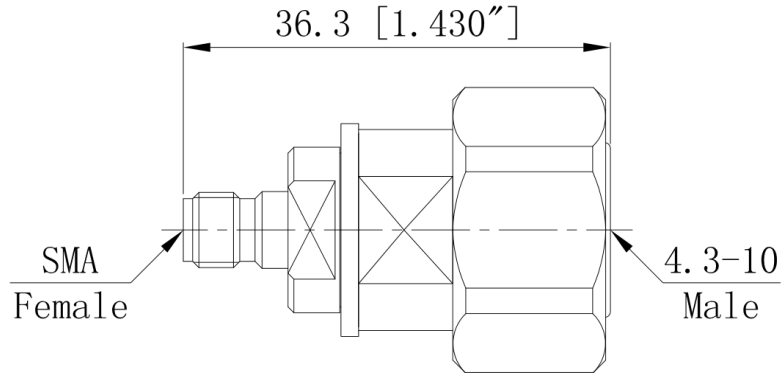

### Electrical & Environmental

<b>Frequency Range</b>	DC-6GHz	<b>Impedance</b>	50 ohm
<b>VSWR</b>	1.15 max	<b>Operating Temp</b>	-55°C to +165°C
<b>PIM</b>	-160dBc min		

### Mechanical & Product Information

<b>Product Number</b>	RAL06D36, H-Grade, Low PIM	<b>Connector</b>	4.3-10 Male to SMA Female
<b>Connector Body</b>	Ternary alloy plated brass	<b>Shape/Mounting</b>	Straight, None
<b>Center Contact</b>	Silver plated beryllium copper	<b>Insulator</b>	PTFE

