




4.3-10 Female to NEX10 Male, Adapter, RAL06D48 DC-6GHz, Straight

Dimensions(mm) Tolerance±1%

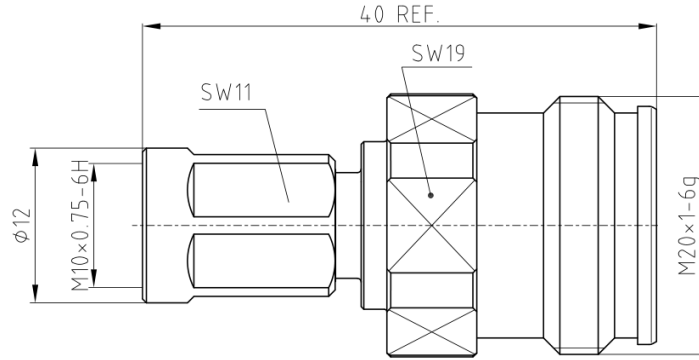


Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-40°C to +155°C
PIM	-160dBc min		

Mechanical & Product Information

Product Number	RAL06D48, H-Grade, Low PIM	Connector	4.3-10 Female to NEX10 Male
Connector Body	Ternary alloy plated brass	Shape/Mounting	Straight, None
Center Contact	Silver plated beryllium copper	Insulator	PTFE

Typical Test Data

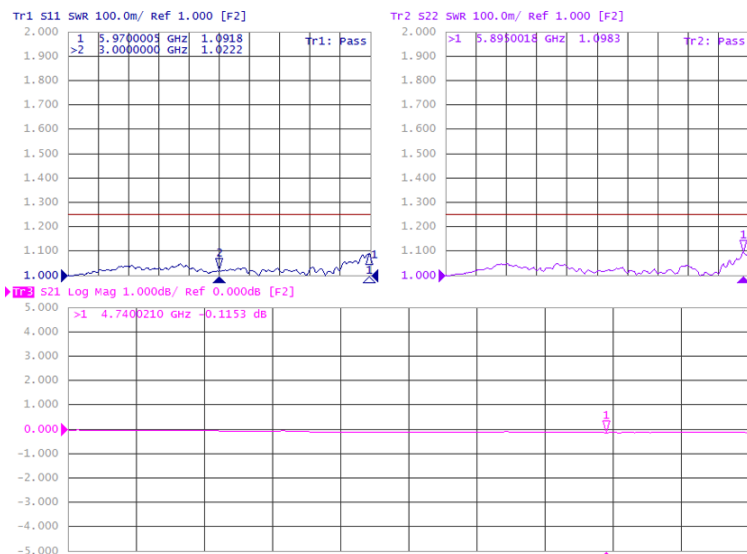

Stimulus	Response	P1 P2	Peak	Result
Port 1	Port 1	42.94 dBm 43.01 dBm	-178.03 dBc	PASS

