


## SMA Female to QMA Female, Adapter, RAL06S01Q DC-6GHz, Straight, Quick Plug

Dimensions(mm) Tolerance $\pm 1\%$

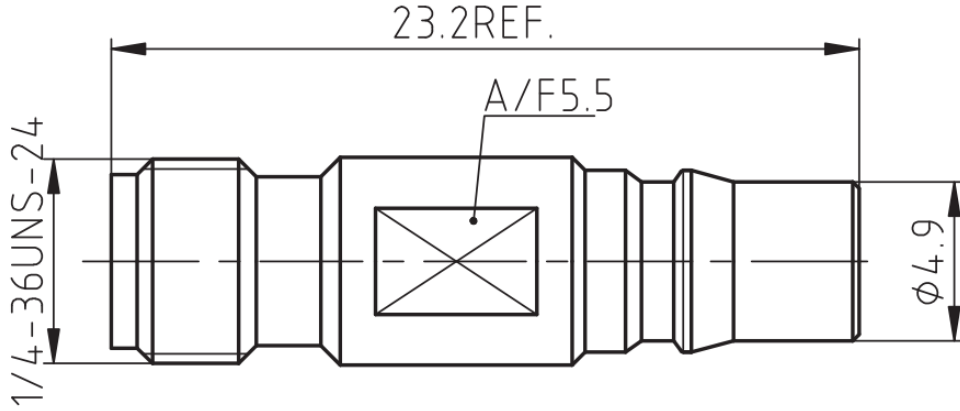

### Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-55°C to +165°C
PIM	-150dBc min		

### Mechanical & Product Information

Product Number	RAL06S01Q, H-Grade, Low PIM	Connector	SMA Female to QMA Female
Connector Body	Ternary alloy plated brass/Bronze	Shape/Mounting	Straight, Quick Plug
Center Contact	BeCu/Brass,Gold plating	Insulator	PTFE

