


## SMA Female to RBMA Female, Adapter, RAL06S14 DC-6GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

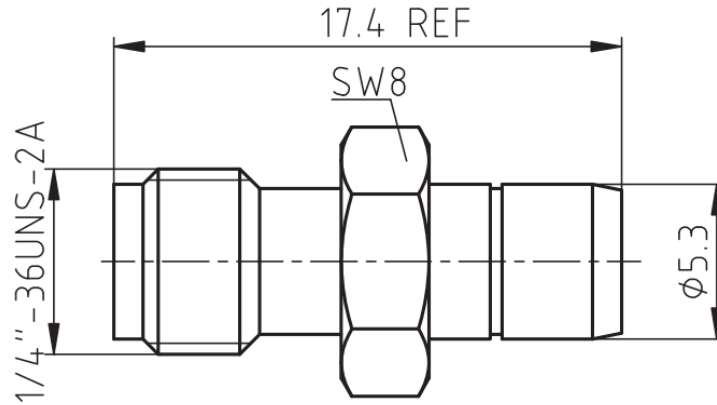

### Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-55°C to +165°C
PIM	-120dBc min		

### Mechanical & Product Information

Product Number	RAL06S14, H-Grade, Low PIM	Connector	SMA Female to RBMA Female
Connector Body	Ternary alloy plated brass	Shape/Mounting	Straight, None
Center Contact	Bronze/Brass,Gold plating	Insulator	PTFE

