




SMA Female 50Ω to F Male 75Ω, RF Matching Pads, RAMP02S01 DC-2GHz, Straight

Dimensions(mm) Tolerance±1%

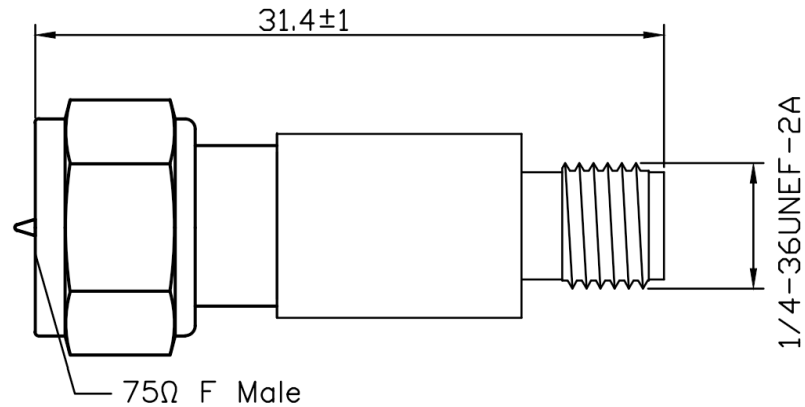

Electrical & Environmental

Frequency Range	DC-2GHz	Impedance	50Ω/75Ω
VSWR	1.35 max	Operating Temp	-40°C to +125°C
Insertion Loss	5.70dB max ±0.5dB		

Mechanical & Product Information

Product Number	RAMP02S01, H-Grade	Connector	SMA Female 50Ω to F Male 75Ω
Connector Body	Passivated stainless steel 303	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE