




**N Male 50Ω to F Male 75Ω, RF Matching Pads, RAMP03N09
DC-3GHz, Straight**

Dimensions(mm) Tolerance±1%

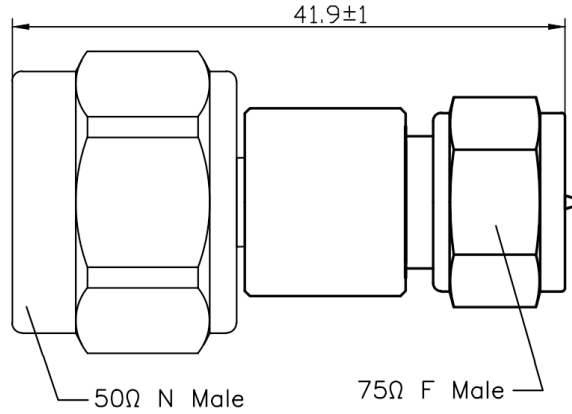

Electrical & Environmental

| | | | |
|------------------------|-------------------|-----------------------|-----------------|
| Frequency Range | DC-3GHz | Impedance | 50Ω/75Ω |
| VSWR | 1.25 max | Operating Temp | -40°C to +125°C |
| Insertion Loss | 5.70dB max ±0.5dB | | |

Mechanical & Product Information

| | | | |
|-----------------------|--|-----------------------|--------------------------|
| Product Number | RAMP03N09, H-Grade | Connector | N Male 50Ω to F Male 75Ω |
| Connector Body | Passivated stainless steel 303/Nickel plated brass | Shape/Mounting | Straight, None |
| Center Contact | Gold plated beryllium copper | Insulator | PTFE |