




SMA Male 50Ω to F Female 75Ω, RF Matching Pads, RAMP03S03
DC-3GHz, Straight

Dimensions(mm) Tolerance±1%

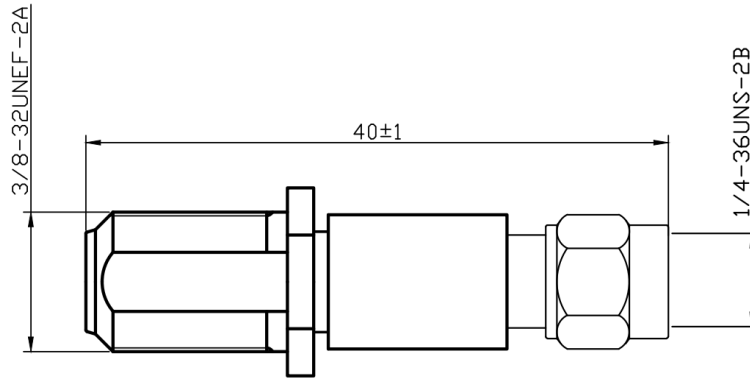

Electrical & Environmental

Frequency Range	DC-3GHz	Impedance	50Ω/75Ω
VSWR	1.25 max	Operating Temp	-40°C to +125°C

Mechanical & Product Information

Product Number	RAMP03S03, H-Grade	Connector	SMA Male 50Ω to F Female 75Ω
Connector Body	Passivated stainless steel 303/Nickel plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE

