




SMA Female 50Ω to N Female 75Ω, RF Matching Pads, RAMP03S06 DC-3GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

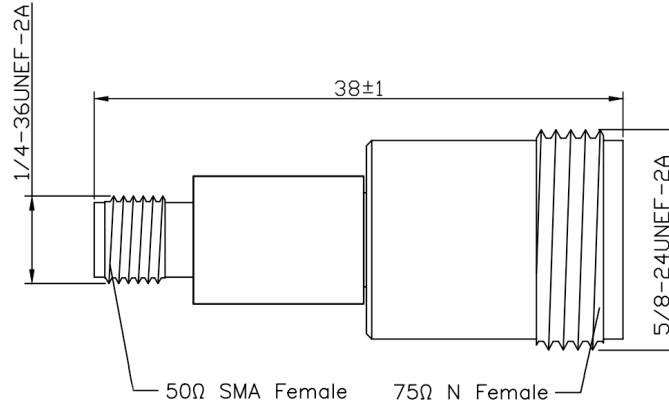

Electrical & Environmental

Frequency Range	DC-3GHz	Impedance	50Ω/75Ω
VSWR	1.25 max	Operating Temp	-40°C to +125°C
Insertion Loss	5.70dB max ± 0.5 dB		

Mechanical & Product Information

Product Number	RAMP03S06, H-Grade	Connector	SMA Female 50Ω to N Female 75Ω
Connector Body	Passivated stainless steel 303/Nickel plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE