




SMA Male to SMA Male, Non-Magnetic Adapter, RANM18S02 DC-18GHz

Dimensions(mm) Tolerance $\pm 1\%$

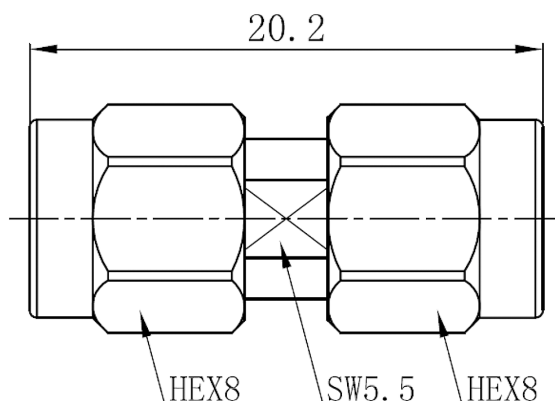


Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	0.20dB max
Mating Cycles	>500 Cycles	OT Range	-55°C to +165°C

Mechanical & Product Information

Product Number	RANM18S02, P-Grade, Non-Magnetic	Connector	SMA Male to SMA Male
Connector Body	Gold plated beryllium copper	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	20.2(L)mm	Net Weight	About 4.8g

Typical Test Data

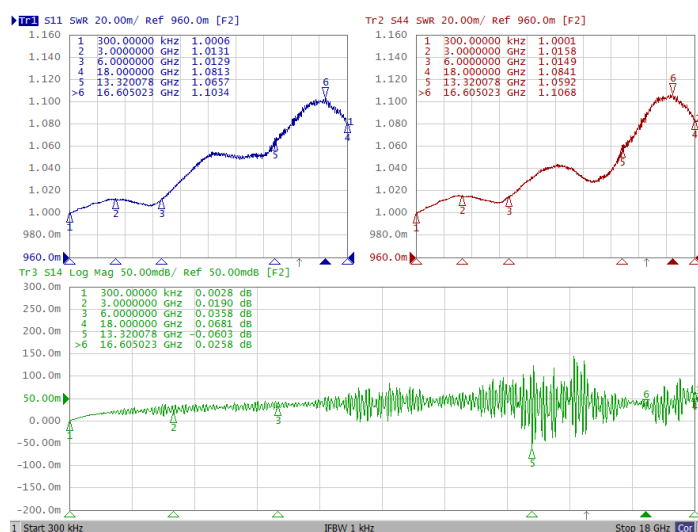



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com [86-755-88840350](tel:86-755-88840350)