




RP-SMA Female to SMA Female, Adapter, RPA18S01-GBA-2L DC-18GHz

Dimensions(mm) Tolerance $\pm 1\%$

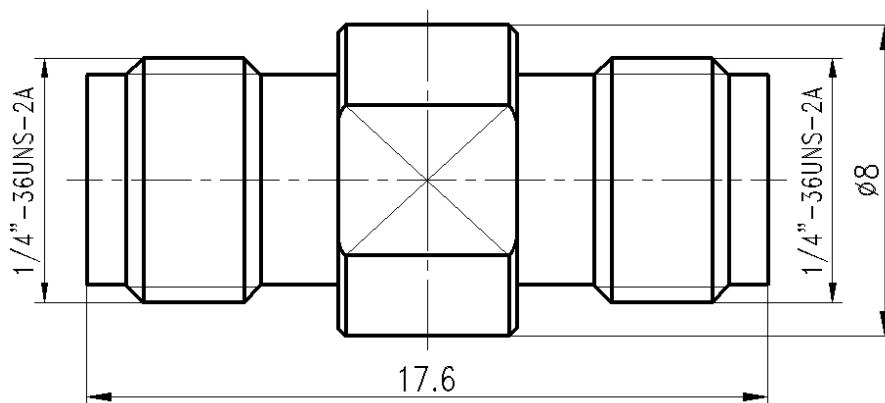

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.20dB max

Mechanical & Product Information

Product Number	RPA18S01-GBA-2L, U-Grade, Reverse Polarity	Connector	RP-SMA Female to SMA Female
Connector Body	Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	17.6(L)*8(φ)mm	Net Weight	-

Typical Test Data

