




RP-SMA Female to SMA Female, Adapter, RPA27S01-L DC-26.5GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

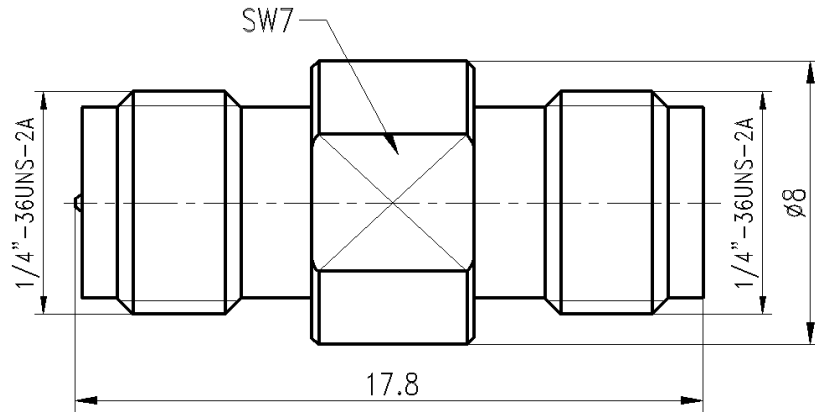


Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.25 max (18-26.5GHz); 1.15 max (DC-18GHz)	Operating Temp	-55°C to +165°C

Mechanical & Product Information

Product Number	RPA27S01-L, JP-Grade, Reverse Polarity	Connector	RP-SMA Female to SMA Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PTFE

Typical Test Data

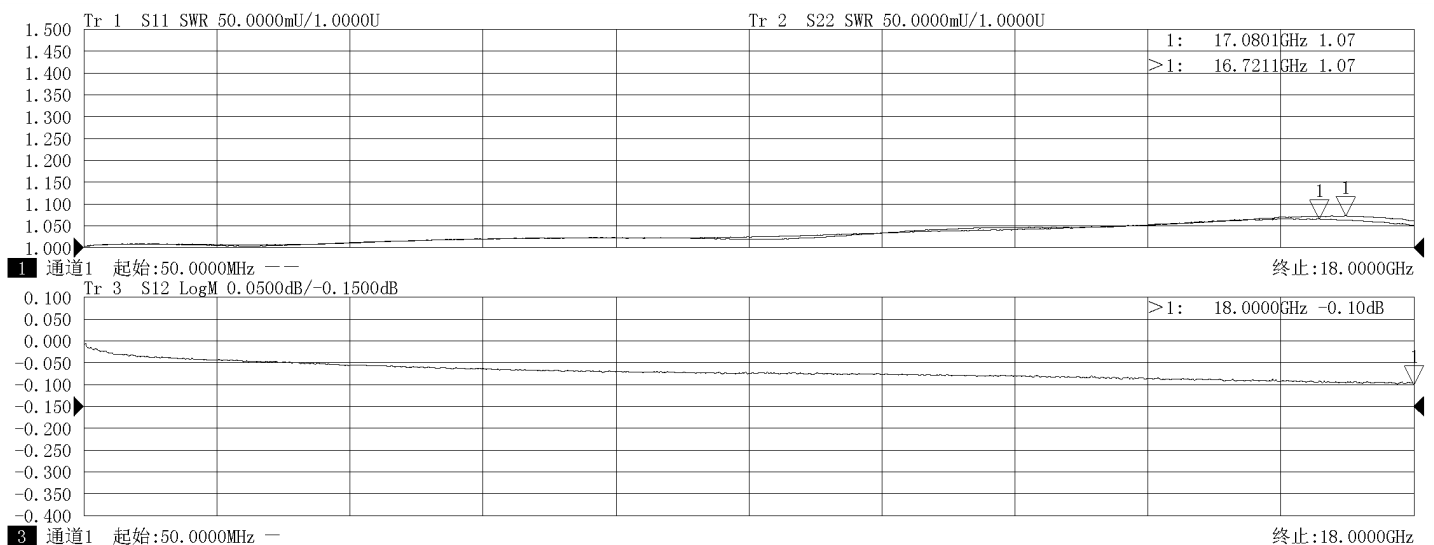



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com 86-755-88840350