


## RP-SMA Male to RP-SMA Female, Adapter, RPA27S03-LR DC-26.5GHz, Straight

### Dimensions(mm) Tolerance $\pm 1\%$

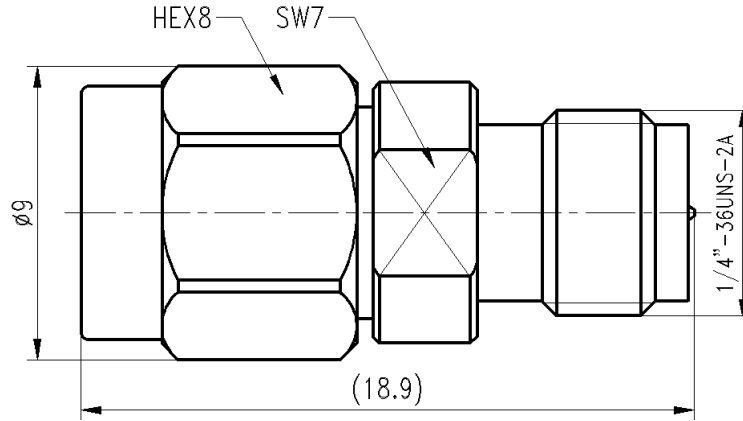

### Electrical & Environmental

<b>Frequency Range</b>	DC-26.5GHz	<b>Impedance</b>	50 ohm
<b>VSWR</b>	1.25 max (18-26.5GHz); 1.15 max (DC-18GHz)	<b>Operating Temp</b>	-55°C to +165°C

### Mechanical & Product Information

<b>Product Number</b>	RPA27S03-LR, JP-Grade, Reverse Polarity	<b>Connector</b>	RP-SMA Male to RP-SMA Female
<b>Connector Body</b>	Passivated stainless steel 316F	<b>Shape/Mounting</b>	Straight, None
<b>Center Contact</b>	1.27um gold plated beryllium copper	<b>Insulator</b>	PTFE

