




2.92mm(K,SK) Power Amplifier, RPA200140K Series

Select the frequency according to the specification table.

Dimensions(mm) Tolerance $\pm 1\%$

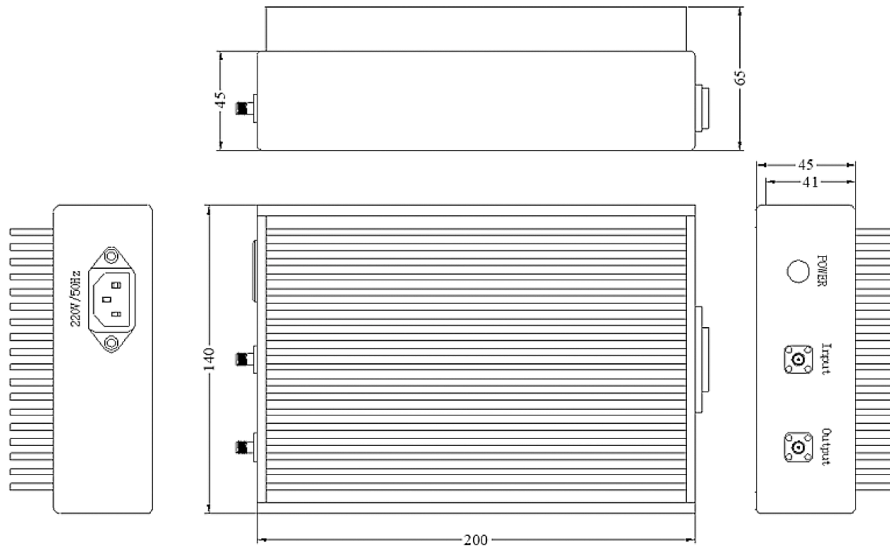

Mechanical & Product Information

Product Number	RPA200140K Series, P-Grade, UWB	Product Type	同轴功率放大器, 50 Ohms
Connector	2.92mm(K,SK)母 - 2.92mm(K,SK)母	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Black anodized aluminum	Operating Temp.	0 ~ +50°C
Dimensions	200×140×45(Heat sink Not included)mm	Net Weight	约 2.5kg
Power supply	DC/AC, DC 12 Volts Typ. Or AC 220V		

Product Selection

RFTOP P/N	Freq.Range	Gain Typ.	Flatness	P1dB	Psat	IN VSWR	Power
RPA200140KA-18F40-38 AC 220V	18-40GHz	38dB (Min 35dB)	± 5.0 dB Typ.	30dBm	33dBm	≤ 2	5dBm

Customized: including frequency range, P1dB, Psat, input/return power and other electrical performance indicators.