


2.92mm(K,SK) PA Module, RPAM160120K Series

Select the frequency according to the specification table.

Dimensions(mm) Tolerance±1%

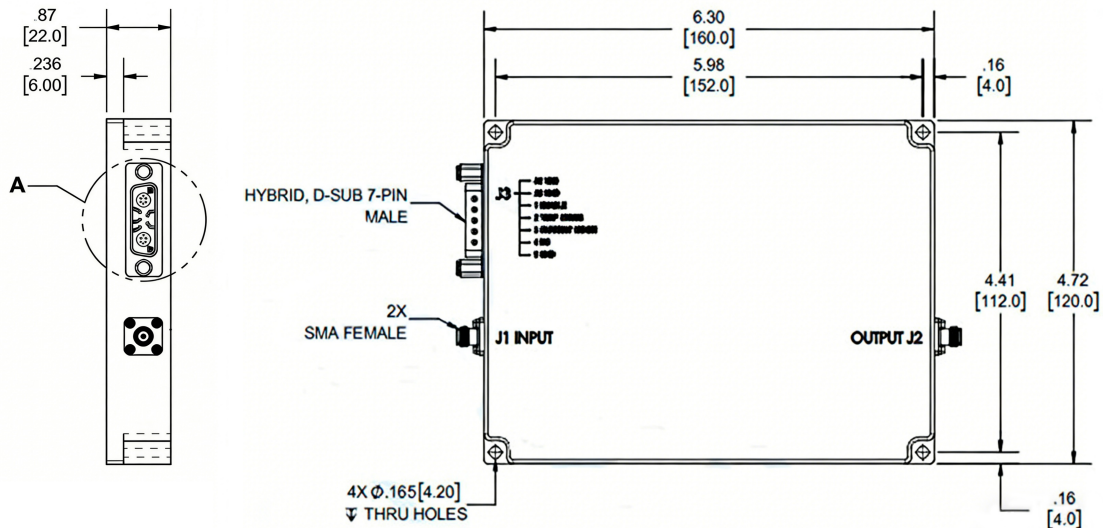

Mechanical & Product Information

Product Number	RPAM160120K Series, P-Grade, UWB	Product Type	同轴功放模块, 50 Ohms
Connector	2.92mm(K,SK)母 - 2.92mm(K,SK)母	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Gold plated brass	Operating Temp.	0 ~ +55°C
Dimensions	160×120×22mm	Net Weight	约 550.0g
Power supply	PIN, DC 24 Volts Typ. +26V Max, 8 A Typ. 10A Max		

Product Selection

RFTOP P/N	Freq.Range	Gain Typ.	Flatness	IN	Power
RPAM160120K-18F26-46	18-26.5GHz	46dB (Min 43dB)	±4.0 dB Typ.		43dBm
RPAM160120K-26F40-43	26.5-40GHz	43dB (Min 40dB)	±4.0 dB Typ.		40dBm

Customized: including frequency range, P1dB, Psat, input/return power and other electrical performance indicators.