


SMA PA Module, RPAM160120SN Series

Select the frequency according to the specification table.

Dimensions(mm) Tolerance $\pm 1\%$

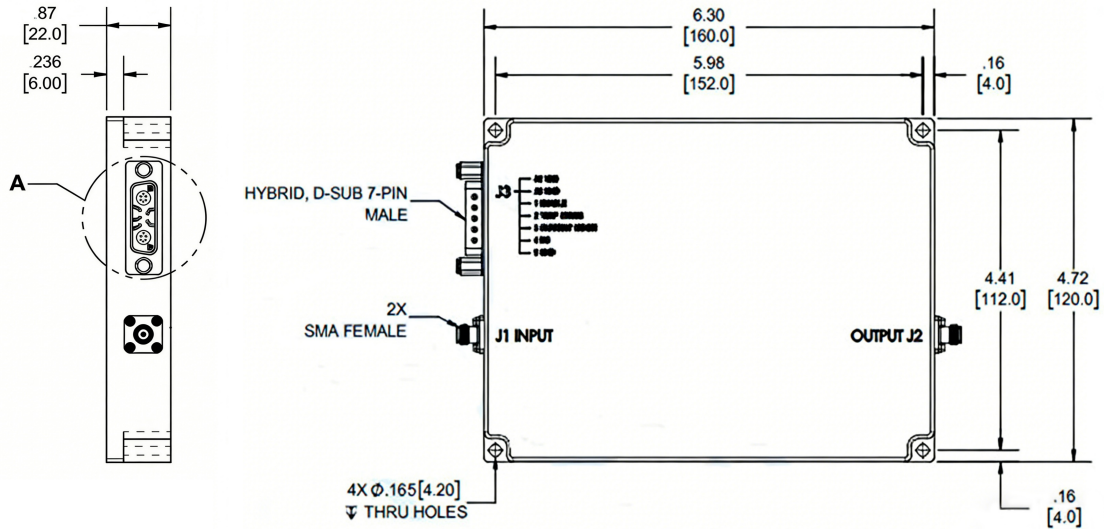

Mechanical & Product Information

Product Number	RPAM160120SN Series, P-Grade, UWB	Product Type	同轴功放模块, 50 Ohms
Connector	SMA母 - N母	Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper		
Housing	Gold plated brass	Operating Temp.	0 ~ +55°C
Dimensions	160×120×22mm	Net Weight	约 550.0g
Power supply	PIN, DC 28 Volts Typ. +30V Max, 16 A Typ. 18A Max		

Product Selection

RFTOP P/N	Freq.Range	Gain Typ.	Flatness	IN	Power
RPAM160120SN-6F18-50	6-18GHz	50dB (Min 47dB)	± 3.0 dB Typ.		47dBm

Customized: including frequency range, P1dB, Psat, input/return power and other electrical performance indicators.