
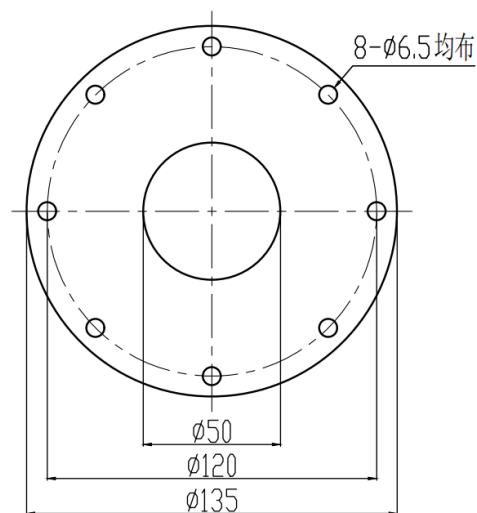


WR28 Standard Gain Horn Antenna, 2.92mm(K,SK) Female, RWHAO28K-20

26.5-40GHz, 20dB Nominal Gain, UBR320 Flange, Right Angle

Dimensions(mm) Tolerance $\pm 1\%$

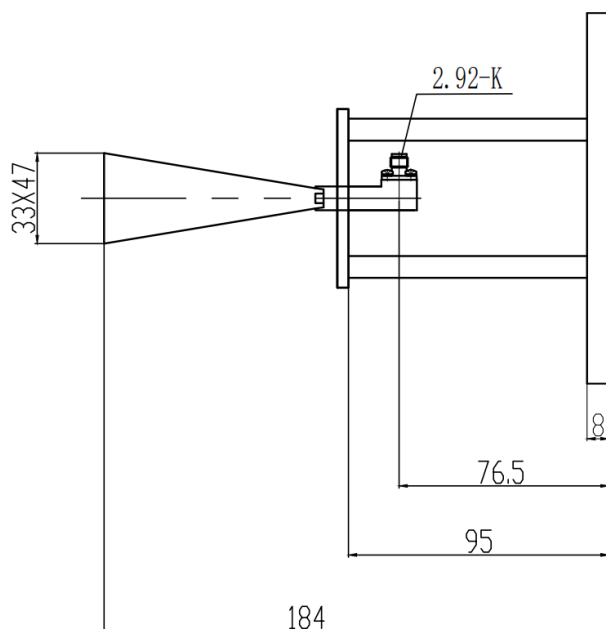


安装端面

Electrical & Environmental

Frequency Range	26.5-40GHz	Impedance	50 Ohm
VSWR	1.5 Max		
Nominal Gain	20 dBi		

Mechanical & Product Information

Product Number	RWHAO28K-20, P-Grade, With bracket	Product Type	Standard Gain Horn Antenna
Connector	2.92mm(K,SK) Female, Right Angle	Connector Body	Passivated stainless steel
Waveguide	WR28(BJ320), UBR320 Flange	Waveguide Body	Copper, Light blue paint
Center Contact	Copper pickling		
Dimensions	184(L)*47(W)*33(H)mm	Net Weight	About 535.5g



WR28 Standard Gain Horn Antenna, 2.92mm(K,SK) Female,
RWHA028K-20
26.5-40GHz, 20dB Nominal Gain, UBR320 Flange, Right Angle

Typical Test Data

