




N Coaxial Fixed Attenuator, R18N30U-XX
DC-18GHz, 30W, 1-50dB, Unidirectional, Round

Dimensions(mm) Tolerance±1%

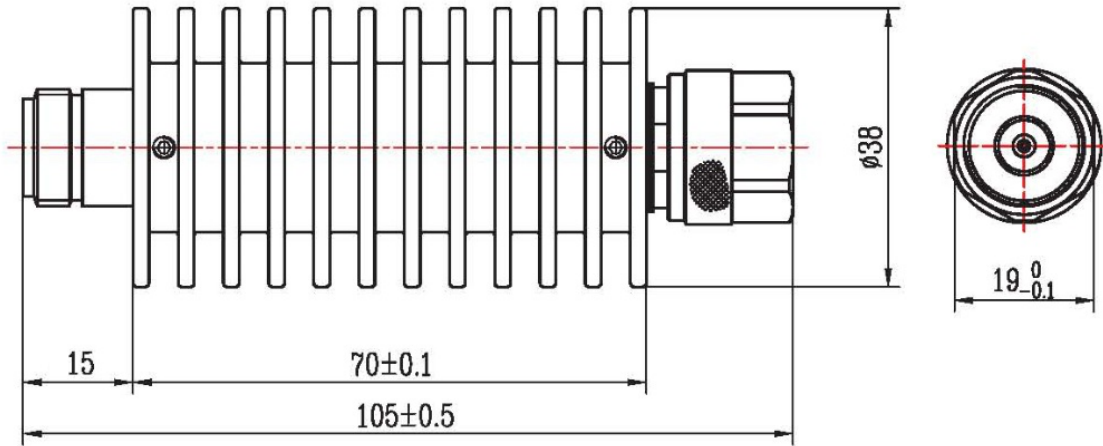

Electrical & Environmental


Frequency Range	DC-18GHz , 50Ohms
VSWR	1.45 Max
Input Avg Power	30W @25°C
Peak Power	800W (5µsec pulse width, 1.8% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Unidirectional, N male input to N female output
Attenuation	1-50dB
Operating Temp	-55°C~+100°C

Product Selection, Customizable		
RFTOP P/N	Values	Accuracy
R18N30U-3	3dB	±0.8dB
R18N30U-6	6dB	±0.8dB
R18N30U-10	10dB	±0.8dB
R18N30U-20	20dB	±0.9dB
R18N30U-30	30dB	±1.1dB
R18N30U-40	40dB	±1.2dB
R18N30U-50	50dB	±1.3dB

Mechanical & Product Information

Product Number	R18N30U-XX
Product Type	Coaxial Fixed Attenuator, P-Grade
Connector	N male, N female
Connector Body	Passivated stainless steel
Center Contact	Gold plated brass, Gold plated beryllium copper
Heat Sink	Black anodized aluminum
Net Weight	About 170.0g

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 80°C. Reference Curve, derate linearly to 3W at 100°C.

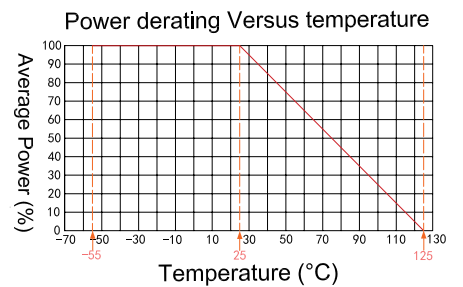

1. Customized connectors, dimensions, directionality, PIM, dB values.
2. Refer to the RFTOP attenuator selection and usage guide.



N Coaxial Fixed Attenuator, R18N30U-XX

DC-18GHz, 30W, 1-50dB, Unidirectional, Round

Typical Test Data

