


4.3-10 Coaxial Fixed Attenuator, R3P15-XX DC-3GHz, 15W, 1-50dB, Bidirectional, Round



Dimensions(mm) Tolerance $\pm 1\%$

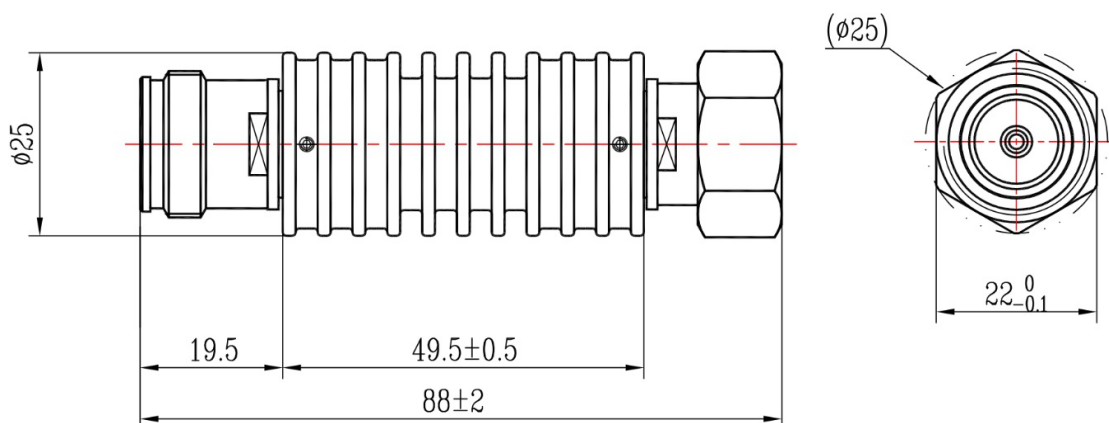

Electrical & Environmental

Frequency Range	DC-3GHz , 50Ohms
VSWR	1.15 Max
Input Avg Power	15W @25°C
Peak Power	500W (5μsec pulse width, 1% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Bidirectional, 4.3-10 male to 4.3-10 female
Attenuation	1-50dB
Operating Temp	-55°C~+125°C


Product Selection, Customizable

RFTOP P/N	ATTEN	Accuracy
R3P15-3	3 dB	± 0.3 dB
R3P15-6	6 dB	± 0.3 dB
R3P15-10	10 dB	± 0.5 dB
R3P15-20	20 dB	± 0.6 dB
R3P15-30	30 dB	± 0.8 dB
R3P15-40	40 dB	± 0.8 dB
R3P15-50	50 dB	± 0.8 dB

Mechanical & Product Information

Product Number	R3P15-XX
Product Type	Coaxial Fixed Attenuator, P-Grade
Connector	4.3-10 male, 4.3-10 female
Connector Body	Ternary alloy plated brass
Center Contact	Gold plated brass, Gold plated beryllium copper
Heat Sink	Black anodized aluminum
Net Weight	About 105.0g

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 80°C. Reference Curve, derate linearly to 2W at 100°C.

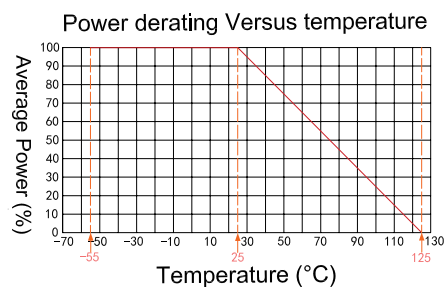

1. Customized connectors, dimensions, directionality, PIM, dB values.

2. Refer to the RFTOP attenuator selection and usage guide.