




2.92mm Coaxial Fixed Attenuator, R40100UA-XX DC-40GHz, 100W, 10-60dB, Unidirectional, Rectangular

Dimensions(mm) Tolerance $\pm 1\%$

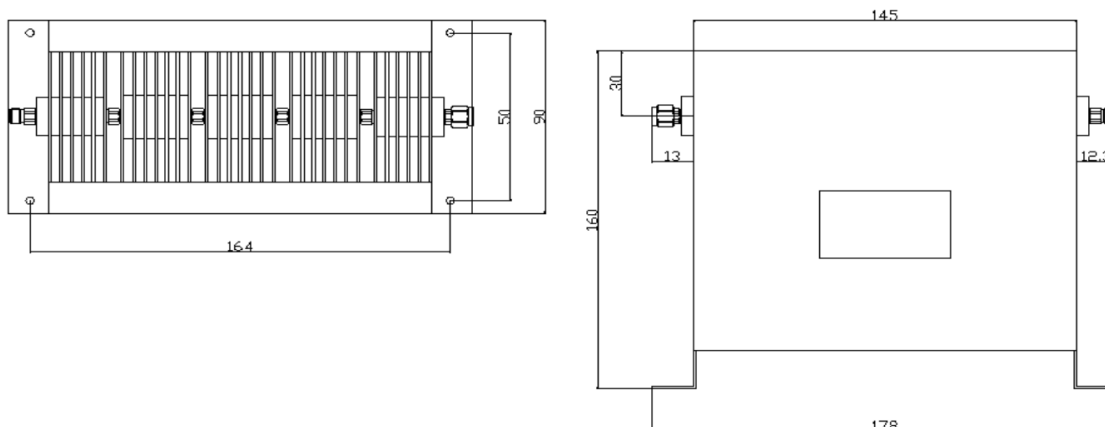

Electrical & Environmental

Frequency Range	DC-40GHz , 50Ohms
VSWR	1.4 Max
Input Avg Power	100W @25°C
Peak Power	1kW (5μsec pulse width, 10% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Unidirectional, 2.92mm male input to 2.92mm female output
Attenuation	10-60dB
Operating Temp	-55°C~+125°C

Product Selection, Customizable


RFTOP P/N	ATTEN	Accuracy
R40100UA-30	30 dB	± 4.0 dB
R40100UA-40	40 dB	± 4.0 dB
R40100UA-50	50 dB	± 4.0 dB
R40100UA-60	60 dB	± 4.0 dB

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 80°C. Reference Curve, derate linearly to 10W at 100°C.

Mechanical & Product Information

Product Number	R40100UA-XX
Product Type	Coaxial Fixed Attenuator, P-Grade, With Fan
Connector	2.92mm male, 2.92mm female
Connector Body	Passivated stainless steel
Center Contact	1.27μm Gold plated beryllium copper
Heat Sink	Black anodized aluminum+Fan
Net Weight	About 892.0g

Power derating Versus temperature

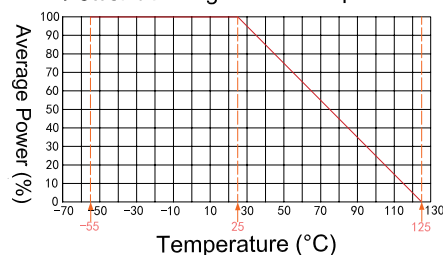

1. Customized connectors, dimensions, directionality, PIM, dB values.
2. Refer to the RFTOP attenuator selection and usage guide.

2.92mm Coaxial Fixed Attenuator, R40100UA-XX DC-40GHz, 100W, 10-60dB, Unidirectional, Rectangular



Typical Test Data

