




L29(DIN 7/16) Coaxial Fixed Attenuator, R4D1000UA-XX DC-4GHz, 1000W, 20-50dB, Unidirectional, Rectangular

Dimensions(mm) Tolerance±1%

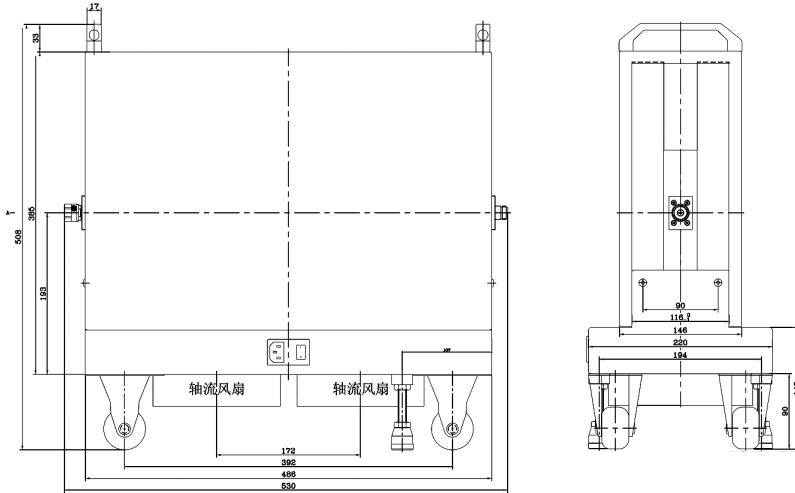

Typical Value
RFTOP P/N
R4D1000UA-20
R4D1000UA-30
R4D1000UA-40
R4D1000UA-50

Electrical & Environmental

Frequency Range	DC-4GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	1000W @25°C	Peak Power	10kW (5μsec pulse width, 5% duty cycle)		
Temp Coefficient	<0.0004 dB/dB/°C	Attenuation	20-50dB, Customizable		
Direction	Unidirectional,L29 male input to L29 female output				

Mechanical & Product Information

Product Number	R4D1000UA-XX, P-Grade	Connector	L29(DIN 7/16)
Connector Body	Ternary alloy plated brass	Heat Sink	Black anodized aluminum
Center Contact	Gold plated brass, Gold plated beryllium copper		
Operating Temp	-55°C~+100°C	Net Weight	About 26.0kg

Attenuation&Accuracy(DC-4GHz)

Attenuation(dB)	20	30	40	50-60
Accuracy(dB)	±3.0	±2.5	±2.5	±2.5

Notes

- To maintain best performance, recommended to use fan to keep the case temp under 85°C.
- Refer to the derating curve for power input,derate linearly to 100 W at 100°C.
- Always pay attention to the direction of attenuators and note IN/OUT markings.
- Customized dB values,outlines and optimal accuracy & VSWR available.

