


L29(DIN 7/16) to N Coaxial Fixed Attenuator, R4N2000UA-XX DC-4GHz, 2000W, 60dB, Unidirectional, Rectangular

Dimensions(mm) Tolerance±1%

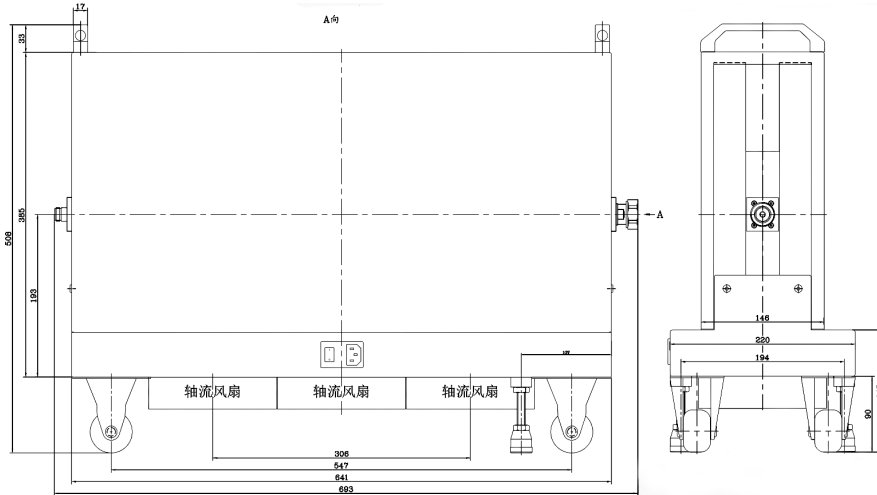

Typical Value
RFTOP P/N
R4N2000UA-60

Electrical & Environmental

Frequency Range	DC-4GHz	Impedance	50 ohm	VSWR	1.4 max
Input Avg Power	2000W @25°C	Peak Power	10kW (5μsec pulse width, 10% duty cycle)		
Temp Coefficient	<0.0004 dB/dB/°C	Attenuation	60dB, Customizable		
Direction	Unidirectional, L29 male input to N female output				

Mechanical & Product Information

Product Number	R4N2000UA-XX, Professional	Connector	L29(DIN 7/16) to N
Connector Body	Ternary alloy plated brass	Heat Sink	Black anodized aluminum
Center Contact	Gold plated brass, Gold plated beryllium copper		
Operating Temp	-55°C~+100°C	Net Weight	-

Attenuation&Accuracy(DC-4GHz)

Attenuation(dB)	60
Accuracy(dB)	±3.5

Notes

1. To maintain best performance, recommended to use fan to keep the case temp under 85°C.
2. Refer to the derating curve for power input, derate linearly to 200 W at 100°C.
3. Always pay attention to the direction of attenuators and note IN/OUT markings.
4. Customized dB values, outlines and optimal accuracy & VSWR available.

