


N Coaxial Fixed Attenuator, R6N700UAH-XX DC-6GHz, 700W, 10-50dB, Unidirectional, Rectangular

Dimensions(mm) Tolerance±1%

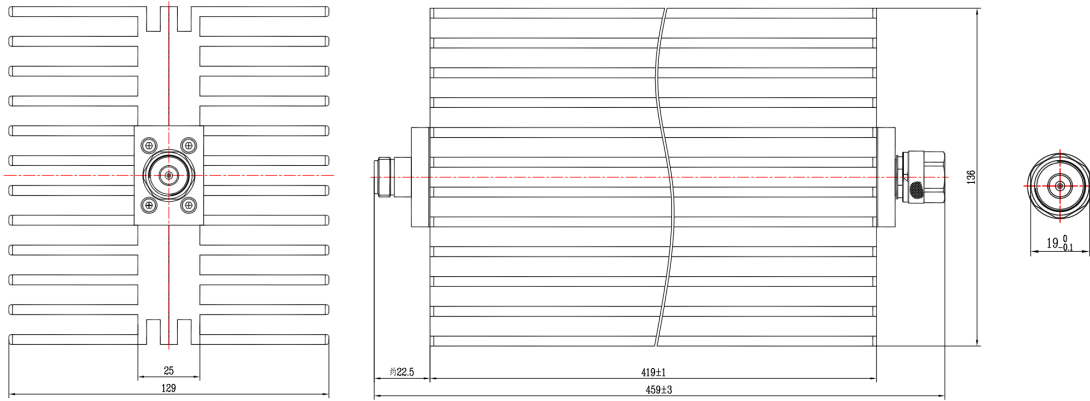

Electrical & Environmental

Frequency Range	DC-6GHz , 50Ohms
VSWR	1.35 Max
Input Avg Power	700W @25°C
Peak Power	5kW (5μsec pulse width, 5% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Unidirectional, N male input to N female output
Attenuation	10-50dB
Operating Temp	-55°C~+125°C

Product Selection, Customizable

RFTOP P/N	ATTEN	Accuracy
R6N700UAH-10	10 dB	±3.0 dB
R6N700UAH-20	20 dB	±3.0 dB
R6N700UAH-30	30 dB	±3.0 dB
R6N700UAH-40	40 dB	±3.0 dB
R6N700UAH-50	50 dB	±3.0 dB

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 80°C. Reference Curve, derate linearly to 70W at 100°C.

Mechanical & Product Information

Product Number	R6N700UAH-XX
Product Type	Coaxial Fixed Attenuator, P-Grade, Anti-pulse
Connector	N male, N female
Connector Body	Ternary alloy plated brass
Center Contact	Gold plated brass, Gold plated beryllium copper
Heat Sink	Black anodized aluminum

1. Customized connectors, dimensions, directionality, PIM, dB values.
2. Refer to the RFTOP attenuator selection and usage guide.

Power derating Versus temperature

