




SMA Coaxial Fixed Attenuator, R6S100FFU-XX DC-6GHz, 100W, 6-60dB, Unidirectional, Round

Dimensions(mm) Tolerance±1%

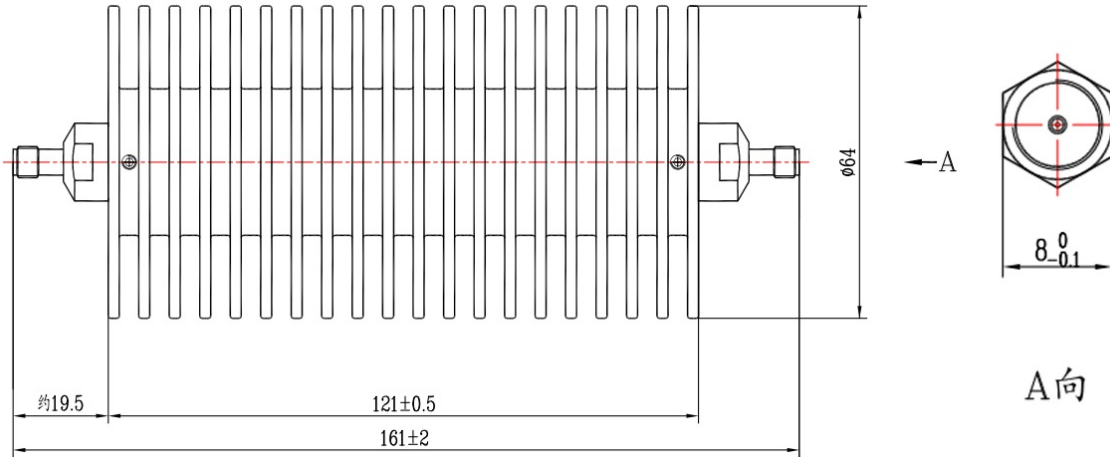

Typical Value
RFTOP P/N
R6S100FFU-6
R6S100FFU-10
R6S100FFU-20
R6S100FFU-30
R6S100FFU-40
R6S100FFU-50
R6S100FFU-60

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	100W @25°C	Peak Power	5kW (5μsec pulse width, 0.5% duty cycle)		
Temp Coefficient	<0.0004 dB/dB/°C	Attenuation	6-60dB, Customizable		
Direction	Unidirectional, SMA female input to SMA female output				

Mechanical & Product Information

Product Number	R6S100FFU-XX, Professional	Connector	SMA
Connector Body	Ternary alloy plated brass	Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper		
Operating Temp	-55°C~+125°C	Net Weight	About 536.0g

Attenuation&Accuracy(DC-6GHz)

Attenuation(dB)	6-10	20	30	40-50	60
Accuracy(dB)	±0.8	±0.8	±0.9	±0.9	±1.0

Notes

1. To maintain best performance, recommended to use fan to keep the case temp under 85°C.
2. Refer to the derating curve for power input, derate linearly to 10 W at 100°C.
3. Always pay attention to the direction of attenuators and note IN/OUT markings.
4. Customized dB values, outlines and optimal accuracy & VSWR available.

