




N Coaxial Fixed Attenuator, R8N10-XX

DC-8.5GHz, 10W, 1-60dB, Bidirectional, Round

Dimensions(mm) Tolerance $\pm 1\%$

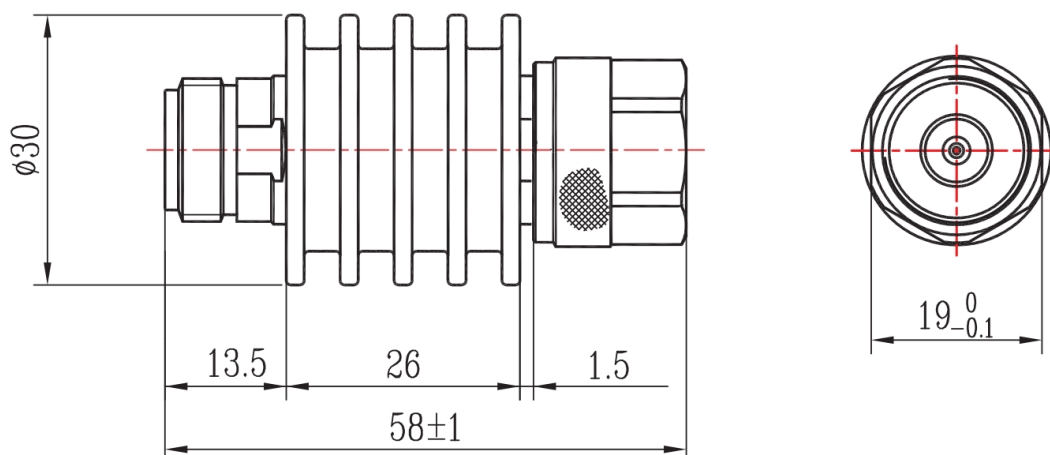

Electrical & Environmental

Frequency Range	DC-8.5GHz , 50ohms
VSWR	1.25 Max
Input Avg Power	10W @25°C
Peak Power	500W (5μsec pulse width, 1% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Bidirectional, N male to N female
Attenuation	1-60dB
Operating Temp	-55°C~+125°C


Product Selection, Customizable

RFTOP P/N	ATTEN	Accuracy
R8N10-3	3 dB	± 0.5 dB
R8N10-6	6 dB	± 0.5 dB
R8N10-10	10 dB	± 0.5 dB
R8N10-20	20 dB	± 0.6 dB
R8N10-30	30 dB	± 0.8 dB
R8N10-40	40 dB	± 0.8 dB
R8N10-50	50 dB	± 0.8 dB
R8N10-60	60 dB	± 1.0 dB

Mechanical & Product Information

Product Number	R8N10-XX
Product Type	Coaxial Fixed Attenuator, P-Grade
Connector	N male, N female
Connector Body	Ternary alloy plated brass
Center Contact	Gold plated brass, Gold plated beryllium copper
Heat Sink	Black anodized aluminum
Net Weight	About 90.0g

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 80°C. Reference Curve, derate linearly to 1W at 100°C.

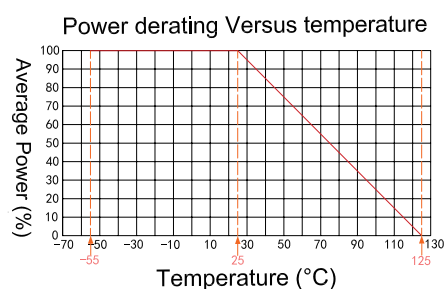

1. Customized connectors, dimensions, directionality, PIM, dB values.
2. Refer to the RFTOP attenuator selection and usage guide.



N Coaxial Fixed Attenuator, R8N10-XX

DC-8.5GHz, 10W, 1-60dB, Bidirectional, Round

Typical Test Data

