




SMA Coaxial Fixed Attenuator, R8S30-XX
DC-8.5GHz, 30W, 1-40dB, Unidirectional, Round

Dimensions(mm) Tolerance±1%

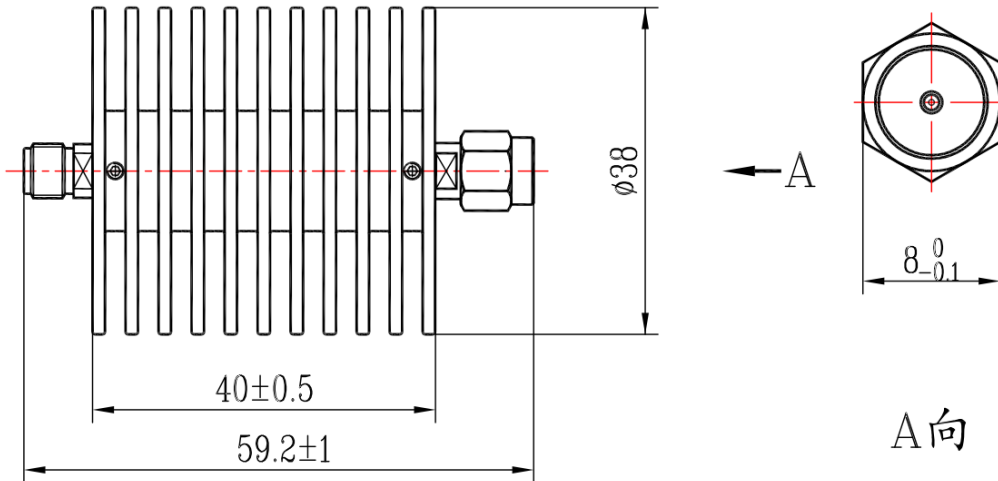

Typical Value	
RFTOP P/N	
R8S30-3	
R8S30-6	
R8S30-10	
R8S30-20	
R8S30-30	
R8S30-40	

Electrical & Environmental

Frequency Range	DC-8.5GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	30W @25°C	Peak Power	1kW (5μsec pulse width, 1% duty cycle)		
Temp Coefficient	<0.0004 dB/dB/°C	Attenuation	1-40dB, Customizable		
Direction	Unidirectional,SMA male input to SMA female output				

Mechanical & Product Information

Product Number	R8S30-XX, Professional	Connector	SMA
Connector Body	Passivated stainless steel	Heat Sink	Black anodized aluminum
Center Contact	Gold plated brass, Gold plated beryllium copper		
Operating Temp	-55°C~+125°C	Net Weight	-

Attenuation&Accuracy(DC-8.5GHz)

Attenuation(dB)	1-10	11-20	21-30	31-40
Accuracy(dB)	±0.5	±0.6	±0.8	±0.8

Notes

1. To maintain best performance, recommended to use fan to keep the case temp under 85°C.
2. Refer to the derating curve for power input,derate linearly to 3 W at 100°C.
3. Always pay attention to the direction of attenuators and note IN/OUT markings.
4. Customized dB values,outlines and optimal accuracy & VSWR available.

