




SMA Push Button Step Attenuator, RASP3S2-60-1 DC-3GHz, 2W, 0-60dB, Unidirectional, Rectangular

Dimensions(mm) Tolerance±1%

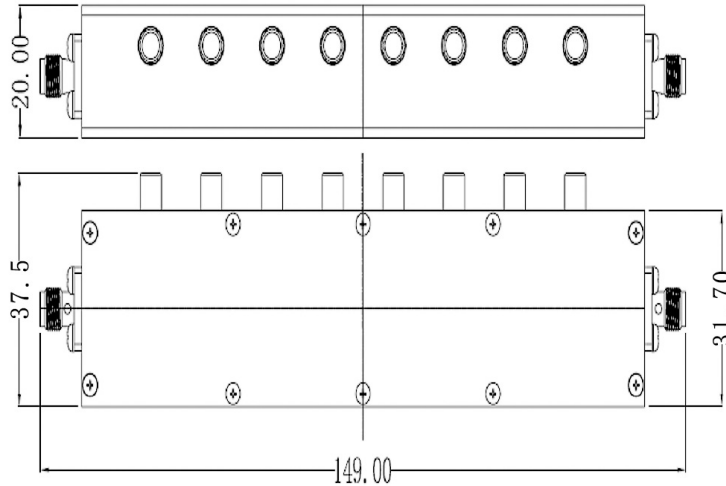

Electrical & Environmental

Frequency Range	DC-3GHz , 50Ohms
VSWR	1.3 Max
Insertion Loss	3.5dB Max
Input Avg Power	2W @25°C
Peak Power	50W (5μsec pulse width, 2% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Unidirectional, SMA female input to SMA female output
Attenuation	0-60dB 1/2/4/8/10/10/10/16dB
Attenuation Step	1dB
Operating Temp	-10°C~+50°C


Attenuation&Accuracy(DC-3GHz)

Attenuation(dB)	Single Key	Combination Key
Accuracy(dB)	±0.9dB Max(0-8dB)	±3.5dB Max(10-20dB)

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 80°C. Reference Curve, derate linearly to 0.2W at 100°C.

Mechanical & Product Information

Product Number	RASP3S2-60-1
Product Type	Push Button Step Attenuator, E-Grade
Connector	SMA female, SMA female
Connector Body	Gold plated brass
Center Contact	Gold plated beryllium copper
Heat Sink	N/A
Net Weight	About 156.5g

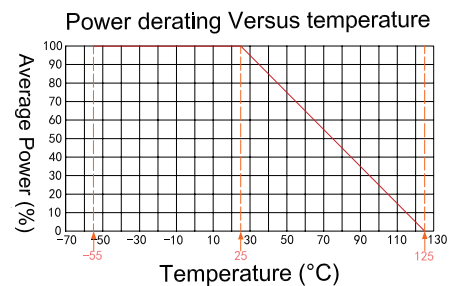

Customization and selection, Refer to RFTOP attenuator selection and usage guide.