




WR12(BJ740) Waveguide Fixed Attenuator, [RWA1250A-XX](#)
60.5-91.9GHz, 50W, 10-30dB, Bidirectional, FUGP740 Flange

Dimensions(mm) Tolerance $\pm 1\%$

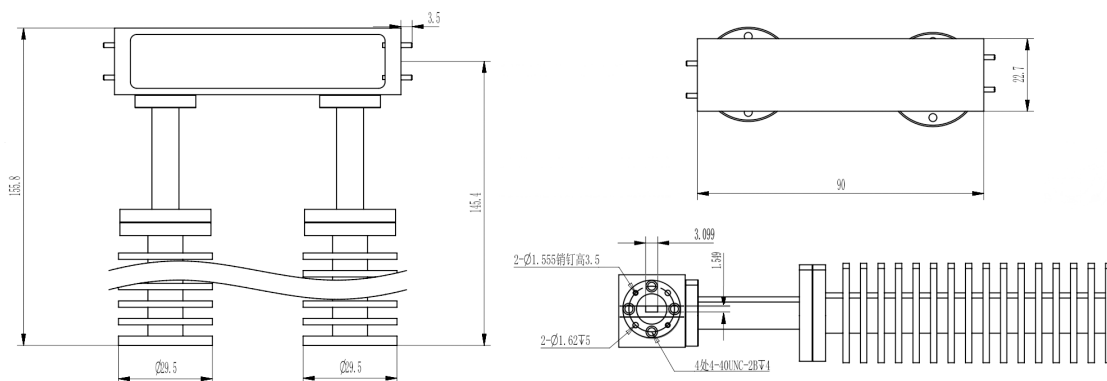

Electrical & Environmental


Frequency Range	60.5-91.9GHz
VSWR	1.2 Max
Input Avg Power	50W @25°C
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Bidirectional
Attenuation	10-30dB
Operating Temp	-55°C~+100°C

Product Selection, Customizable		
RFTOP P/N	ATTEN	Accuracy
RWA1250A-10	10 dB	±1.0 dB
RWA1250A-20	20 dB	±1.2 dB
RWA1250A-30	30 dB	±1.5 dB

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60°C. Reference Curve, derate linearly to 5W at 100°C.

Mechanical & Product Information

Product Number	RWA1250A-XX
Product Type	Waveguide Fixed Attenuator, P-Grade
Waveguide	WR12(BJ740) , FUGP740圆形法兰
Waveguide Body	Copper, gold plated
Waveguide Cavity	Copper, gold plated
Heat Sink	Golden anodized aluminum
Net Weight	About 846.0g

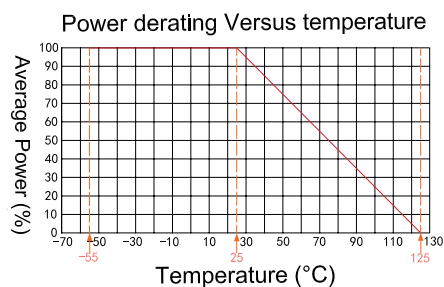

1. Customized connectors, dimensions, directionality, PIM, dB values.
2. Refer to the RFTOP attenuator selection and usage guide.