


Armored Test Cable Assembly, RCP760H-NMNF-L N Male to N Female, DC-18GHz, $\phi 7.6\text{mm}$

Dimensions(mm) Tolerance $\pm 1\%$

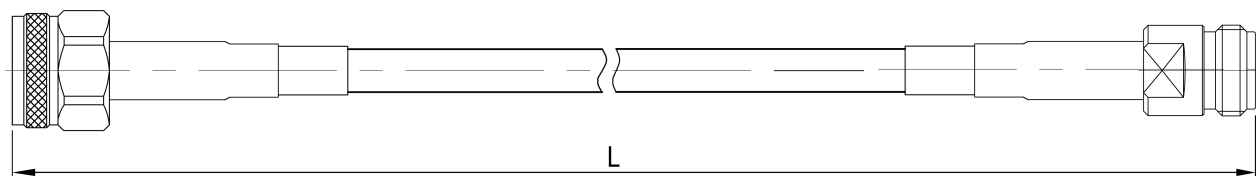

Electrical & Environmental

Frequency Range	DC-18GHz, 50 Ohms
Avg Power@25°C	84W @18GHz
IL@1M	1.88 dB Max @18GHz
VSWR	1.25 Max
VOP	76%
SE	90dB Min
ATTEN-STAB	$\pm 0.03\text{dB}$ Max
Mech. Phase	$\pm 2.7^\circ$
OT	-40~+150°C

Product Information

Product Number	RCP760H-NMNF-L
Product Type	Armored Test Cable Assembly
Cable	RCT500/RCP760
Connector	N Male to N Female
Connector Body	Passivated stainless steel
Center Contact	Gold plated brass & Gold plated beryllium copper
Bend Radius	30.50mm
Bend Radius (Rep.)	61.00mm

Customized services: including connectors, length, phase matching/tracking, time delay, and better electrical performance.

RCT500/RCP760 Structure Characteristics



Structure	Material	$\Phi\text{D}(\text{mm})$
1.Center Conductor	Single-core Silver-plated Copper	1.02
2.Dielectric	LD-PTFE	3.07
3.Inner shield	Silver-plated Copper Tape Braiding	3.27
4.Interlayer	LD-PTFE	3.57
5.Outer Shield	Silver-plated Copper Wire Braiding	3.97
6.Jacket	Yellow FEP	4.60
7.Spring	Stainless steel Tape	6.40
8.Braided Layer	Tinned Wire	6.90
9.Stable Layer	PTFE	7.15
10.Armor Jacket	Purplish Black PTFE	7.60

Product Selection and Loss Index @25°C

RFTOP P/N	3GHz	10GHz	18GHz
RCP760H-NMNF-600	0.74 dB	1.06 dB	1.29 dB
RCP760H-NMNF-1M	0.96 dB	1.50 dB	1.88 dB
RCP760H-NMNF-1.5M	1.25 dB	2.05 dB	2.62 dB
RCP760H-NMNF-2M	1.53 dB	2.60 dB	3.35 dB