


## BNC Male Cable Connector, RC06BMB-B3A

### DC-6GHz, Straight, Attachment for RG-174、RG316 Cable

Dimensions(mm) Tolerance $\pm 1\%$

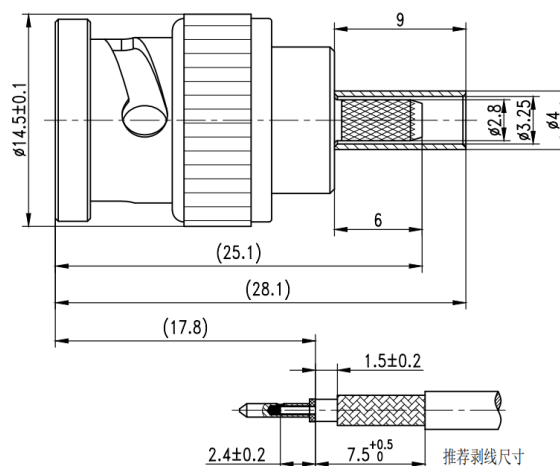

## Electrical & Environmental

|                 |              |                   |                |
|-----------------|--------------|-------------------|----------------|
| Frequency Range | DC-6GHz      | Impedance         | 50 ohm         |
| VSWR            | 1.25 max     | Withstand Voltage | 500 V          |
| Mating Cycles   | > 500 Cycles | Temperature Range | -55°C ~ +165°C |

## Mechanical & Product Information

|                |                                                |                   |          |
|----------------|------------------------------------------------|-------------------|----------|
| Product Number | RC06BMB-B3A, H-Grade                           | Connector         | BNC Male |
| Shape/Mounting | Straight                                       | Attachment Method | Solder   |
| Attachment for | RG-174、RG316 Series Cable                      |                   |          |
| Connector Body | Nickel plated brass/Ternary alloy plated brass | Insulator         | PTFE     |
| Center Contact | Gold plated beryllium copper/Gold plated brass |                   |          |
| Dimension      | 25.1(L)mm                                      | Net Weight        | -        |